
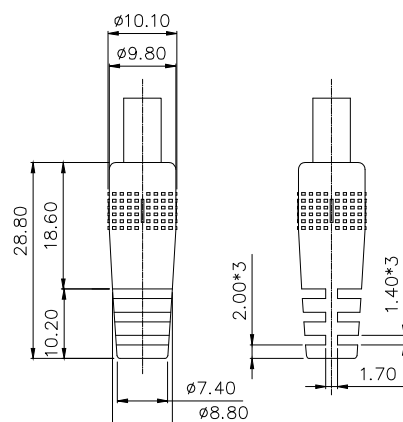


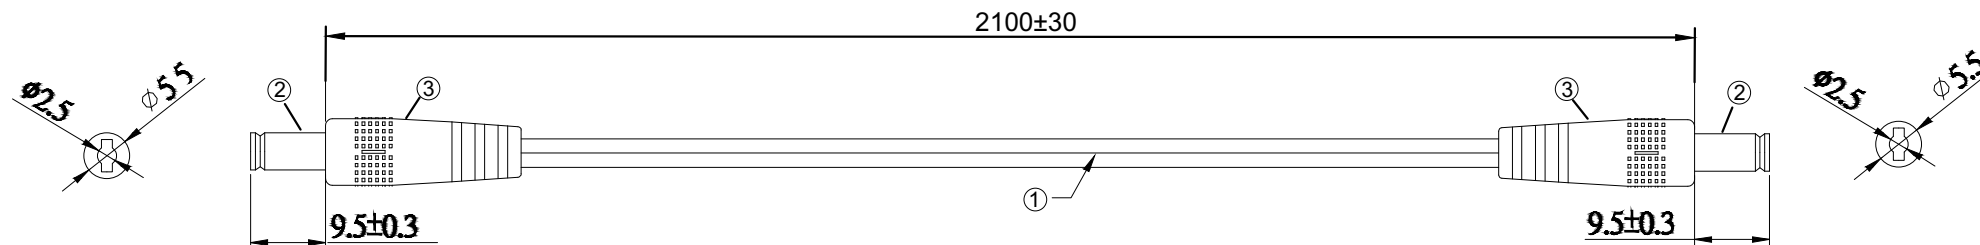

ASSIGNMENT :

DC/M	PIN	SHELL
DC/M	條紋邊	印字邊

一般模具尺寸公差表	
長度(MM)	公差範圍(MM)
5以下(含)	±0.2
10以下(含)	±0.5
30以下(含)	±1
31以上(含)	±1.5

NOTES:

1. 100% OPEN & SHORT TEST
2. CONDUCTIVE RESISTANCE : 5 Ohms MAX
3. INSULATION RESISTANCE : 10M Ohms MIN
4. HI-POT : 300V DC/10ms
5. The product is HSF compliant.

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION STANDARD
①	CABLE	UI2468 18AWG(0.16/BC*41)*2C OD:2.1*4.2 黑色
②	CONNECTOR	DC 5.5*2.5*21 MALE (NICKEL) 音叉式黑色帶尾
③	OUTER MOLD	PVC 45P 黑色

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DCX2-552518-M2M1-LF

SERIES

2100mm

LEADFREE

MALE TO MALE

18 AWG

5.5x2.5Ø

DESCRIPTION: