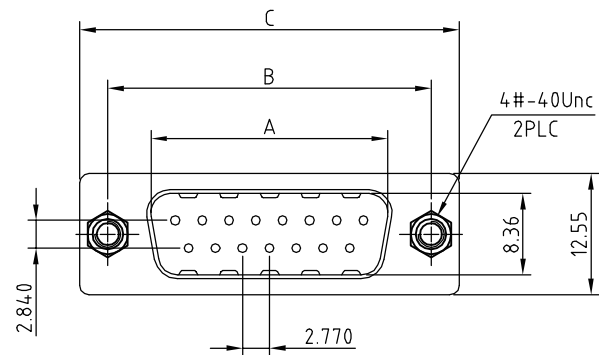


ELECTRICAL CHARACTERISTICS

Contact Current Rating:3Amperes.

Dielectric Withstanding Voltage:AC 500V at sea level.

Insulation Resistance:1000Megohms Min.

Contact Resistance:30Milliohms Max.

Operation Temperature : -55°C to +105°C.

Material

Contact :Copper Alloy.

Insulator:PBT.

Shell: SPCC.


Screw: Copper Alloy.

Boardlock: Copper Alloy.

Note:

No.	A	B	C	D
09	16.92	24.99	30.81	19.23
15	25.25	33.32	39.14	27.56
25	38.96	47.04	53.04	41.28
37	55.42	63.50	69.32	57.33

Recommend Layout PCB.

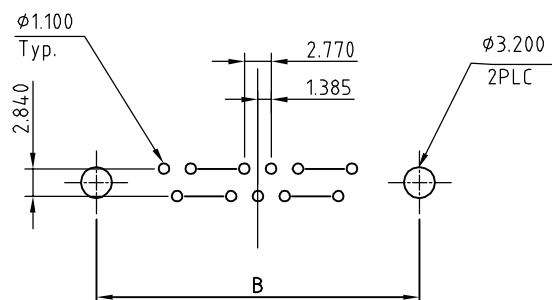

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ±

ORDER INFORMATION

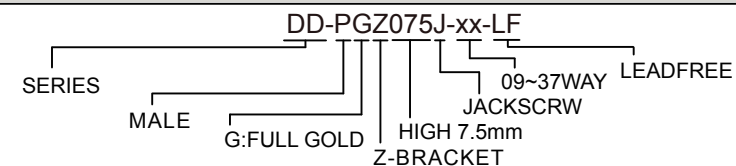

DESCRIPTION: