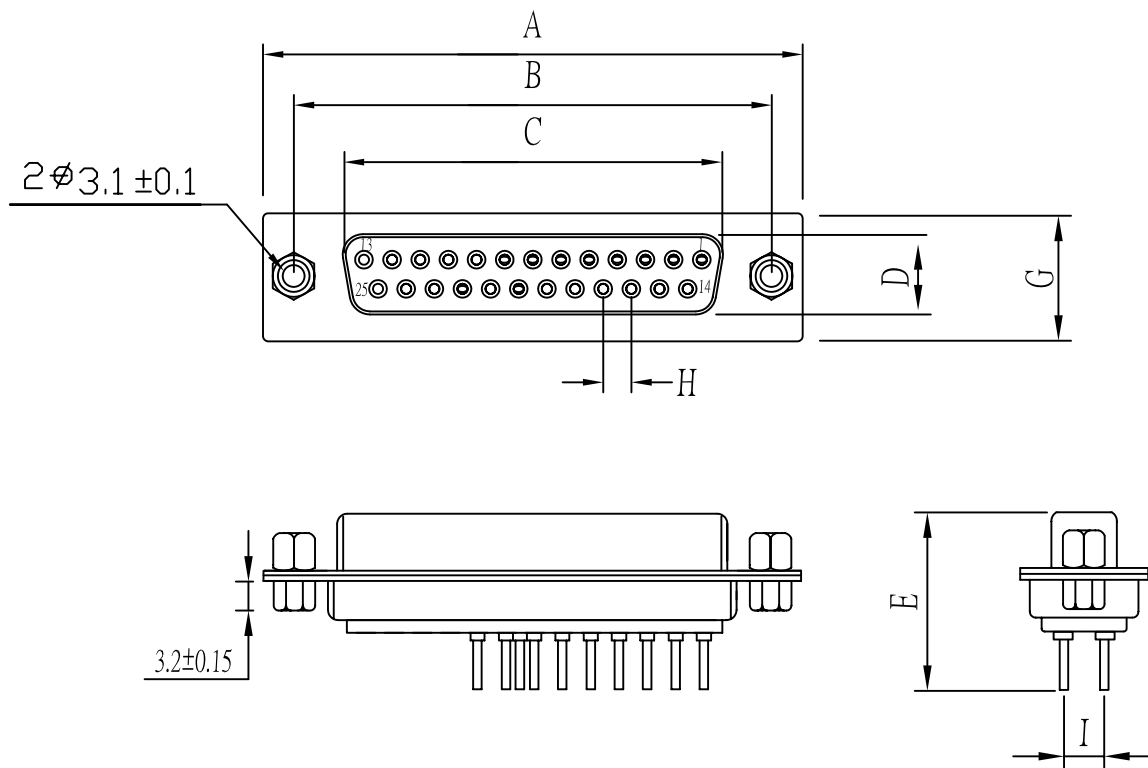


PC BOARD LAYOUT

Note:

1.Material:

- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.20mm
- 1.3 Shell: Spcc,t=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mW Max.
- 2.4 Insulation resistance: 1000 MW Min.
- 2.5 Total mating force: 7.0 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55°C~85°C

PART NO	A±0.25	B±0.20	C±0.20	D±0.20	E±0.30	G±0.25	H±0.05	I±0.10	J±0.25
DD-SGNJE15-09	30.81	24.99	16.33	7.9	16.8	12.55	2.77	2.84	
DD-SGNJE15-15	39.25	33.32	24.66	7.9	16.8	12.55	2.77	2.84	
DD-SGNJE15-19	44.80	38.86	30.0	7.9	16.8	12.55	2.77	2.84	
DD-SGNJE15-23	50.30	44.3	35.3	7.9	16.8	12.55	2.77	2.84	
DD-SGNJE15-25	53.04	47.04	38.38	7.9	16.8	12.55	2.77	2.84	
DD-SGNJE15-37	69.50	63.50	54.84	7.9	16.8	12.55	2.77	2.84	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DD-SGNJE15-xx-LF
SERIES
LEADFREE
09-37 WAY
EMPTY 9.10.11.12.13.14
15.16.17.18.19.21.23.24.25
FEMALE
FULL/GOLD JACKSCREW
NUT

DESCRIPTION: D-SUB P.C.B FEMALE (鍍後型通孔)