


Recommend PCB. Layout

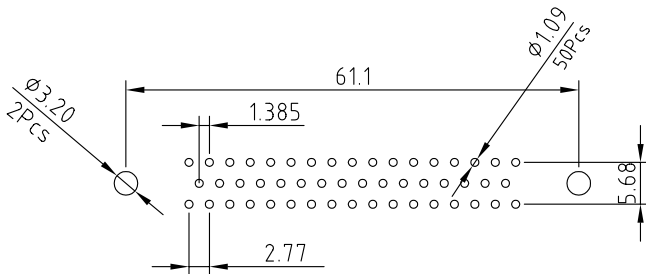

### ELECTRICAL CHARACTERISTICS

Contact Current Rating: 3Amperes.  
 Dielectric Withstanding Voltage: AC 500V at sea level.  
 Insulation Resistance: 1000Megohms Min.  
 Contact Resistance: 25Milliohms Max.  
 Operation Temperature : -55°C to +105°C.

### Material

Contact :Copper Alloy.  
 Insulator:PBT. [Select PA6T /LCP /PA9T]  
 Shell: SPCC.  
 Screw: Copper Alloy.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±  
 .X ± 0.30  
 .XX ± 0.25  
 .XXX ± 0.15  
 ANG ±

PJECTION

照片框

### ORDER INFORMATION

DD-SGZ-50-LF  
 SERIES | CLIP | LEADFREE  
 | GOLD | 50 WAY  
 | FEMALE

DESCRIPTION: D-SUB 50 Female 180D- DIP