


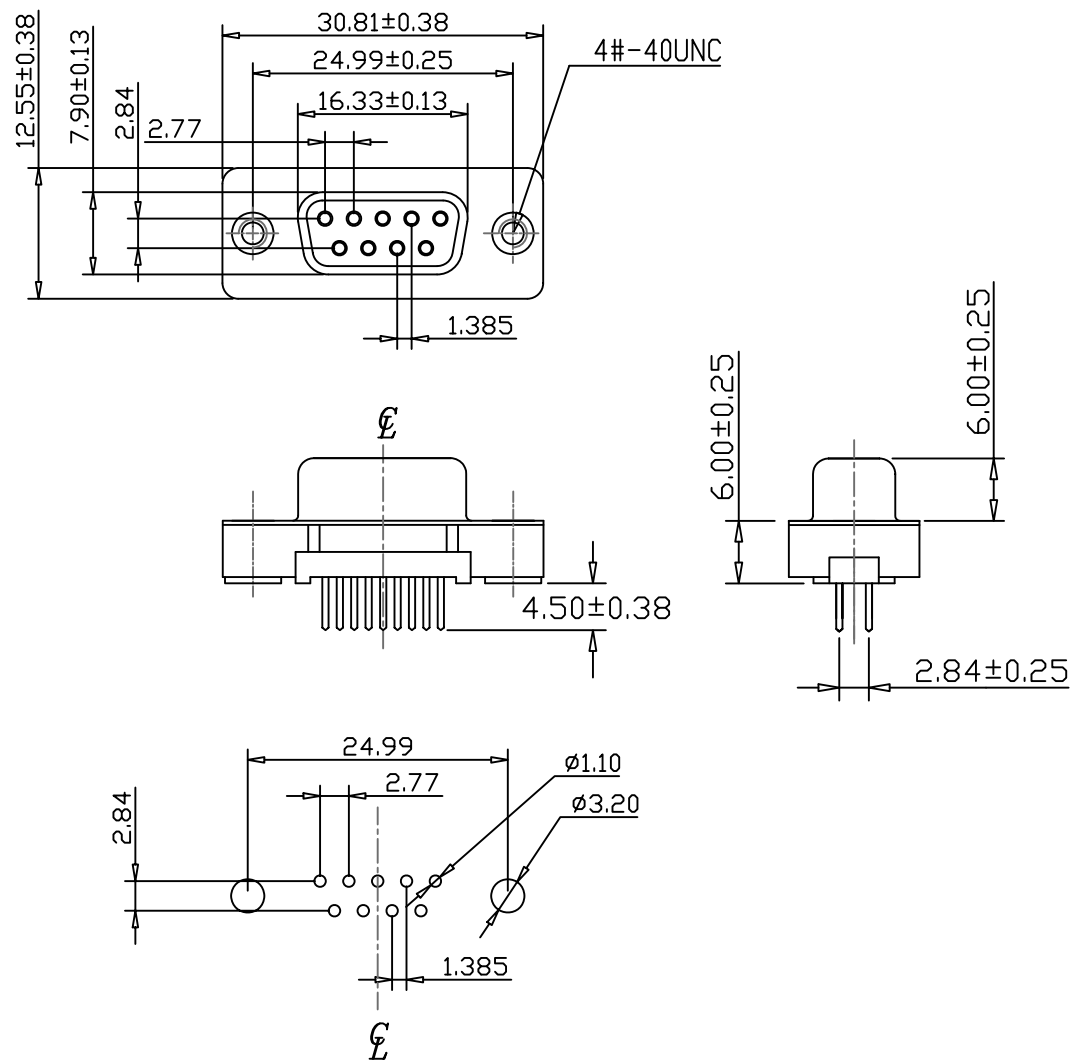

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes.

Dielectric Withstanding Voltage: AC 1000/60sec
.r.m.s.

Insulation Resistance: 5000 Medohms Minimum.
at DC 500V.

Contact Resistance: 25 Milliohms Maximum.

Operating Temperature: -55°C to +105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force: 341 g. Maximum.

Contact Separation Force: 21 g. Minimum.

MATERIALS:

Contacts: Brass.

Insulator: PBT UL 94V-0 Rated.

Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash 1u" Gold.

Shell: Nickel Plated.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DDM-S45N-09-LF

SERIES NUT
DIP 4.5mm
FEMALE

DESCRIPTION: D-SUB 9 FEMALE STRAIGHT DIP MOUNT