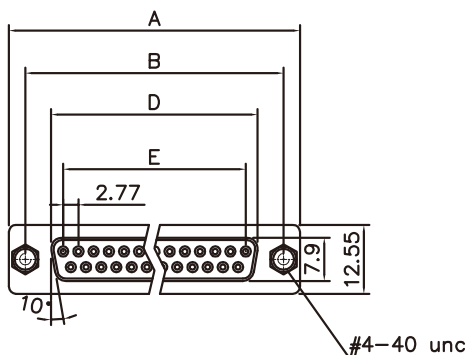


#4-40 unc screw installed

Product Specification

Material

Insulator :Glass-Filled Thermoplastic PBT or PA9T,UL94V-0 rated

Contact : Copper alloy

Shell : Steel, 100u" Tin Over 50u" min Copper

Boardlock :Brass, 100u" min Tin Plated.

Screwlock :Steel, 80u" min Nickel Plated.

Electrical

Contact Resistance :20 milliohms

Insulation Resistance :1000




magohms at 500 VDC

Dielectric Withstanding Voltage :




1000 VAC/rms 60Hz for 1 minute

Current Rating :3 AMP

Volatge Rating :250 VAC/rms 60Hz

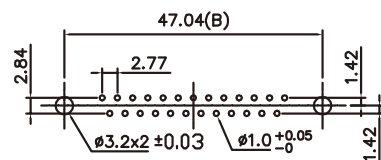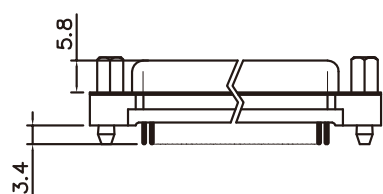

Recomended PCB Layout

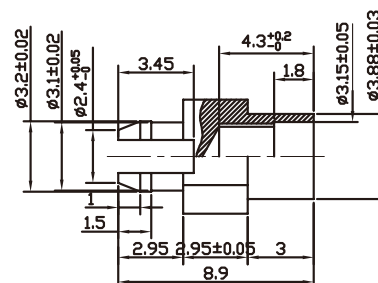

SCALE: 4 : 1

Dimensions

Positions	A	B	D	E
9	30.81	24.99	16.33	11.08
15	39.20	33.30	24.70	19.39
25	53.05	47.04	38.40	33.24
37	69.40	63.50	54.80	49.86

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.38

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.13


DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

DDM-SZNJ-xx-LF

SERIES
LEADFREE
09~37WAY
JACKSCRW
NUT
CLIP
FEMALE

DESCRIPTION: D-SUB STRAIGHT TYPE W/O METAL REAR SHELL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com