
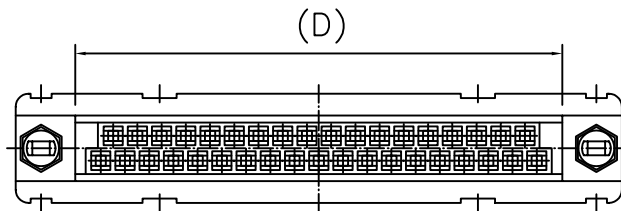



Specifications

Contact Resistance: $\leq 30m$ max. at DC
 100mA Ω
 Insulator Resistance: 1000M min. at DC
 500V
 Current Rating: 5 AMP
 Dielectric Withstanding
 Voltage: AC 1000V For 1 minute
 Operating Temperature: $-55^{\circ}C \sim +235^{\circ}C$
 Contact: PHOSPHOR BRONZE
 Housing: NYLON 6T

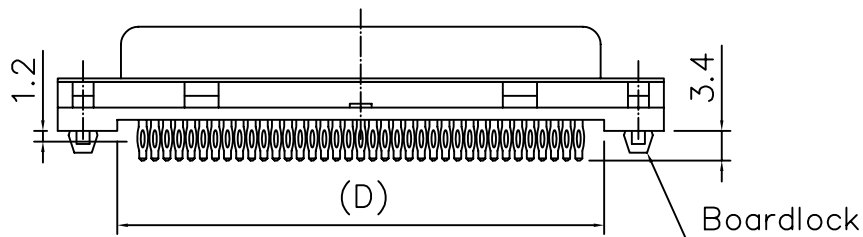

Dimension

Position	A	B	C	D
09	30.81	24.99	16.33	16.96
15	39.14	33.32	24.66	25.18
25	53.04	47.04	38.38	39.12
37	69.32	63.50	54.84	55.68

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. \pm
 .X \pm
 .XX \pm
 .XXX \pm
 ANG \pm

PJECTION

照片框

ORDER INFORMATION

DDP-SZ-xx-LF
 SERIES | LEADFREE
 | 09-37WAY
 | CLIP
 | FEMALE

DESCRIPTION: D-SUB STRAIGHT PRESS-FIT TYPE