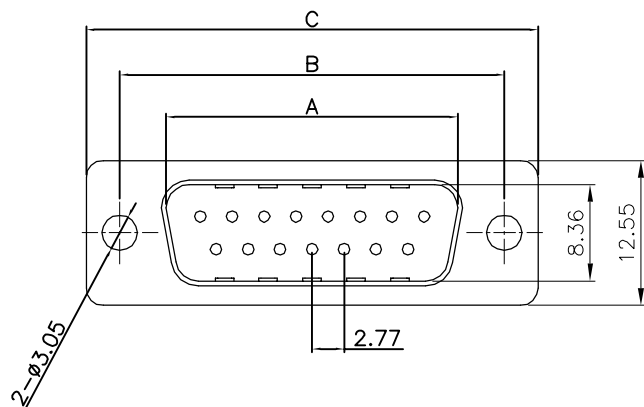


Recommend PCB Layout

1. Specification:

Contact Current Rating: 3 Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operation Temperature: -55°C to +105°C.

2. Material:

Contact: Copper Alloy
 Insulator: Selection (PBT/PA6T/LCP/PA9T)
 Screw: Copper Alloy.
 Shell: SPCC.

No.	A	B	C	D
09	16.92	24.99	30.81	19.23
15	25.25	33.32	39.14	27.56
25	38.96	47.04	53.04	41.28
37	55.42	63.50	69.32	57.33

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.35
 .XX ± 0.25
 .XXX ± 0.15
 ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

DE-PS-xx-LF
 SERIES LEADFREE
 09~37
 SOLDER
 MALE

DESCRIPTION: D-SUB, MALE, SOLDER TYPE