
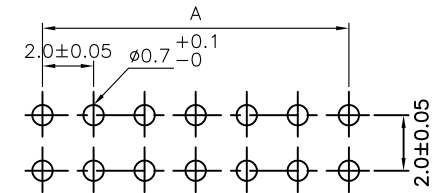


WAFER

Poles: 06~50
Material: Post: Copper Alloy Tin/Plated
Base: FR50 UL94V-0 (Ivory)
Q'ty: 1,000 pcs/bag

ELECTRICAL:


CURRENT RATING: 3A AC, DC.
VOLTAGE RATING: 250 AC, DC.
TEMPERATURE: -25°C~+85°C.
CONTACT RESISTANCE: INITIAL VALUE/10m Ohm Max.
INSULATION RESISTANCE: 1000 M Ohm Min.
WITHSTANDING VOLTAGE: 800V AC/MINUTE.
APPLICABLE WIRE: AWG#28~#22
APPLICABLE PC BOARD THICKNESS: 1.6mm

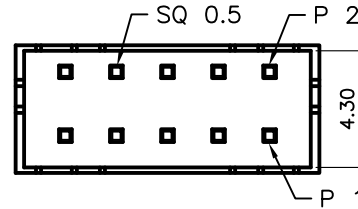


Recommended P.C.B. Layout




註: 目前6P,10P因設計變更產品無
LOGO

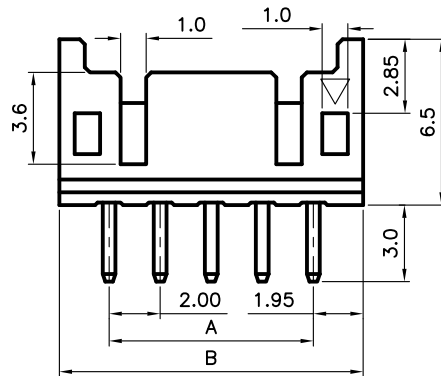

10P~50P



8P

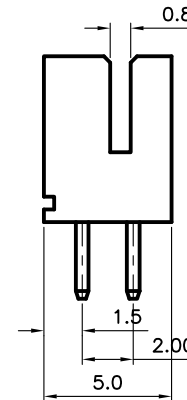

6P

Poles	Dimension in. (mm)	
	A	B
6	0.157(4.0)	0.311(7.9)
8	0.236(6.0)	0.389(9.9)
10	0.315(8.0)	0.469(11.9)
12	0.394(10.0)	0.547(13.9)
14	0.472(12.0)	0.626(15.9)
16	0.551(14.0)	0.705(17.9)
18	0.630(16.0)	0.783(19.9)
20	0.709(18.0)	0.862(21.9)
22	0.787(20.0)	0.941(23.9)
24	0.866(22.0)	1.020(25.9)
26	0.945(24.0)	1.098(27.9)
28	1.024(26.0)	1.177(29.9)
30	1.102(28.0)	1.256(31.9)
32	1.181(30.0)	1.335(33.9)
34	1.259(32.0)	1.413(35.9)
36	1.338(34.0)	1.492(37.9)
38	1.417(36.0)	1.570(39.9)
40	1.496(38.0)	1.649(41.9)
42	1.574(40.0)	1.728(43.9)
44	1.653(42.0)	1.807(45.9)
46	1.732(44.0)	1.886(47.9)
48	1.811(46.0)	1.965(49.9)
50	1.889(48.0)	2.043(51.9)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

DF11-D-2Xxx-LF

SERIES LEADFREE
2X03:06WAY
2X25:50WAY
DIP 180°

DESCRIPTION: Pitch 2.0mm Straight type P.C.B. Connector