


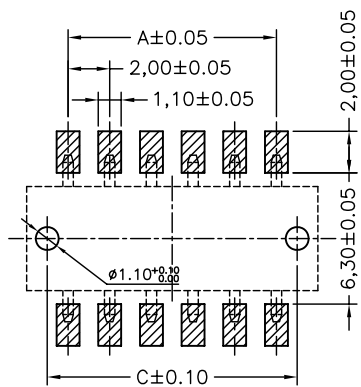






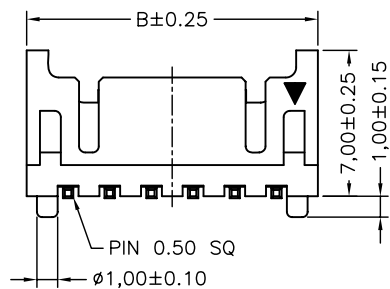

P.C.B LAYOUT




CAP
(FOR PICK AND
PLACE SYSTEMS)



02P~03P

CAP
(FOR PICK AND
PLACE SYSTEMS)



04P~20P

SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass
Cap: Nylon 6T,UL94V-0,Natural(Beige)

Circuit No.	Dimensions			
	A	B	C	D
2X02P	2.00	6.00	4.00	4.70
2X03P	4.00	8.00	6.00	6.70
2X04P	6.00	10.00	8.00	8.70
2X05P	8.00	12.00	10.00	10.70
2X06P	10.00	14.00	12.00	12.70
2X07P	12.00	16.00	14.00	14.70
2X08P	14.00	18.00	16.00	16.70
2X09P	16.00	20.00	18.00	18.70
2X10P	18.00	22.00	20.00	20.70
2X11P	20.00	24.00	22.00	22.70
2X12P	22.00	26.00	24.00	24.70
2X13P	24.00	28.00	26.00	26.70
2X14P	26.00	30.00	28.00	28.70
2X15P	28.00	32.00	30.00	30.70
2X16P	30.00	34.00	32.00	32.70
2X17P	32.00	36.00	34.00	34.70
2X18P	34.00	38.00	36.00	36.70
2X19P	36.00	40.00	38.00	38.70
2X20P	38.00	42.00	40.00	40.70

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±



ORDER INFORMATION

DF11-VPC-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X20:40WAY
CAP
POST
180°SMT

DESCRIPTION: 2.00mm PITCH 180° WAFER-SMT TYPE