

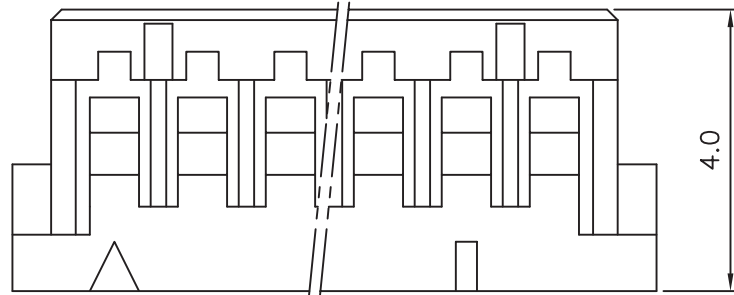


HOUSING

Poles: 2-15, and 20 25 30
 Material: Nylon 66, UL94-V0 Light Brown

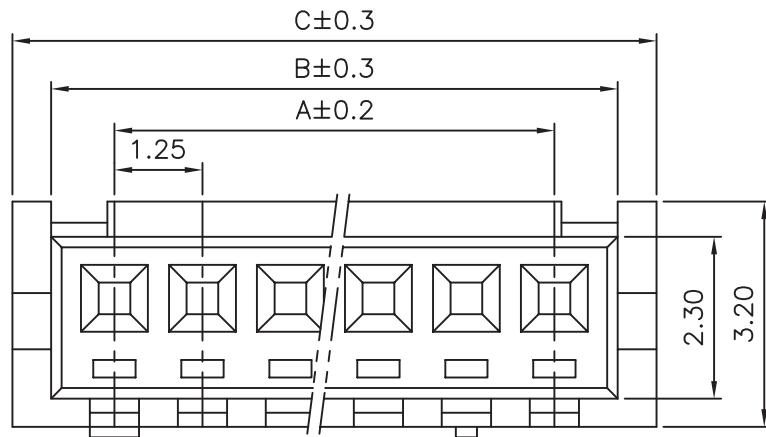

Poles	Ordering code	Dimension in. (mm)		
		A	B	C
2	DF13-H-1X02	0.049(1.25)	0.120(3.05)	0.163(4.15)
3	DF13-H-1X03	0.098(2.5)	0.169(4.3)	0.212(5.4)
4	DF13-H-1X04	0.147(3.75)	0.218(5.55)	0.261(6.65)
5	DF13-H-1X05	0.196(5.0)	0.267(6.8)	0.311(7.9)
6	DF13-H-1X06	0.246(6.25)	0.316(8.05)	0.360(9.15)
7	DF13-H-1X07	0.295(7.5)	0.366(9.3)	0.409(10.4)
8	DF13-H-1X08	0.344(8.75)	0.415(10.55)	0.458(11.65)
9	DF13-H-1X09	0.393(10.0)	0.464(11.8)	0.507(12.9)
10	DF13-H-1X10	0.442(11.25)	0.513(13.05)	0.557(14.15)
11	DF13-H-1X11	0.492(12.5)	0.562(14.3)	0.606(15.4)
12	DF13-H-1X12	0.541(13.75)	0.612(15.55)	0.655(16.65)
14	DF13-H-1X14	0.639(16.25)	0.710(18.05)	0.753(19.15)
15	DF13-H-1X15	0.688(17.5)	0.763(19.4)	0.803(20.4)
20	DF13-H-1X20	0.935(23.75)	1.014(25.75)	1.057(26.85)
25	DF13-H-1X25	1.181(30.0)	1.260(32.0)	1.303(33.1)
30	DF13-H-1X30	1.427(36.25)	1.506(38.25)	1.549(39.35)

SPECIFICATIONS

Voltage rating: AC 250V DC
 Current rating: AC,DC,1A
 Withstand voltage: AC 500 V/min.
 Insulation resistance: 1000MΩ min.
 Temperature range: -25°C~+85°C
 Applicable PC board thickness: 0.8~1.6mm
 Contact resistance: Initial value/10 mΩ max.
 After environmental Testing/30 mΩ max.

DF13-H-1Xxx-LF
 LEADFREE
 02~30WAY

RoHS Compliant



PART NO. DF13-H-1Xxx

DWG NO. DF13-H-1Xxx

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

Pitch 1.25mm single row
 Housing Equivalent HRS DF13

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

