
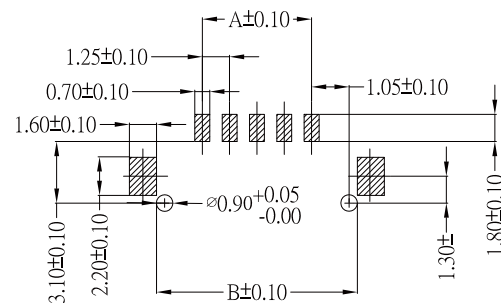


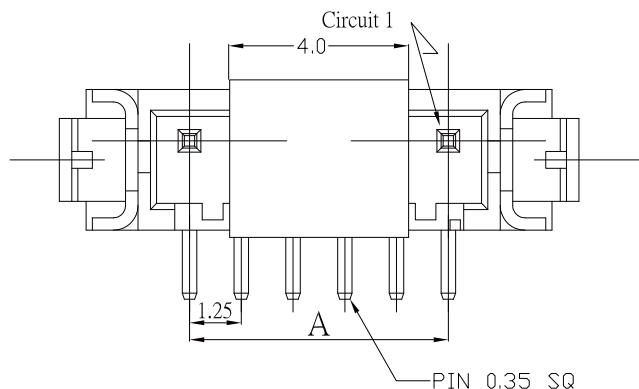

PCB Layout

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 100V AC DC

Operating Temp: -25°C ~ +85°C

Insulation Resistance: 500MΩ / min.

Withstand Voltage: 500V AC/ min.

Contact Resistance: 20MΩ / max.



Material

Terminal Material:

PIN: Brass/ Tin-plated

Solder Tabs: Phosphor Bronze/Tin-Plated

Material: Nylon 6T, UL94V-0

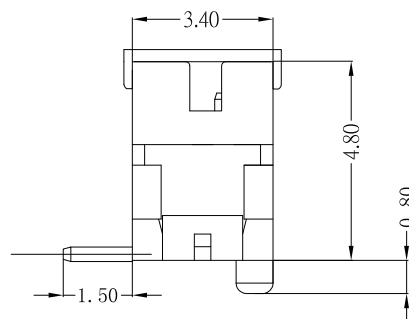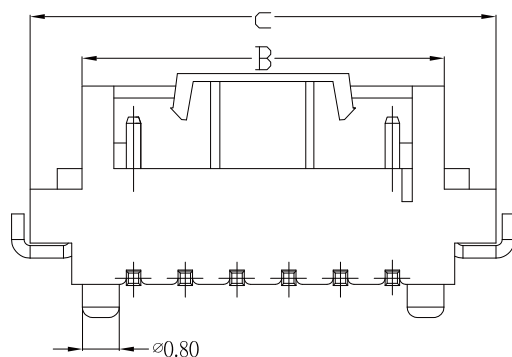

Circuit 1	DIMENSIONS			PART NO.	Note.
	A	B	C		
2	1.25	4.15	6.25	DF13-VPC-1X02	
3	2.50	5.40	7.50	DF13-VPC-1X03	
4	3.75	6.65	8.75	DF13-VPC-1X04	
5	5.00	7.90	10.00	DF13-VPC-1X05	
6	6.25	9.15	11.25	DF13-VPC-1X06	
7	7.50	10.40	12.50	DF13-VPC-1X07	
8	8.75	11.65	13.75	DF13-VPC-1X08	
9	10.00	12.90	15.00	DF13-VPC-1X09	
10	11.25	14.15	16.25	DF13-VPC-1X10	
11	12.50	15.40	17.50	DF13-VPC-1X11	
12	13.75	16.65	18.75	DF13-VPC-1X12	
13	15.00	17.90	20.00	DF13-VPC-1X13	
14	16.25	19.15	21.25	DF13-VPC-1X14	
15	17.50	20.40	22.50	DF13-VPC-1X15	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DF13-VPC-1Xxx-LF

SERIES | LEADFREE
1X02:02WAY
1X15:15WAY
CAP
POST
180°SMT

DESCRIPTION: 1.25mm Wire-to-Board Header SMD 180° TYPE