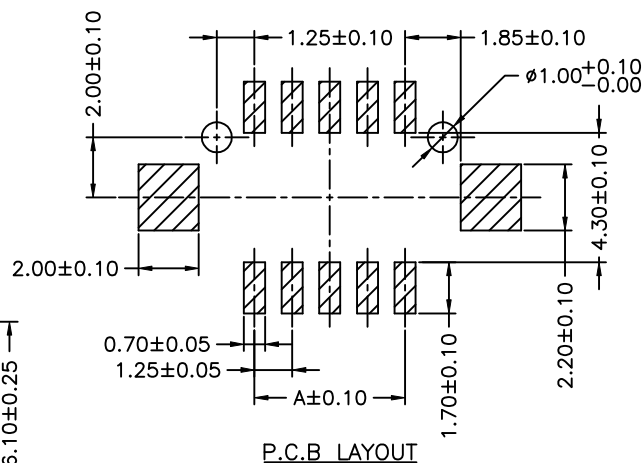
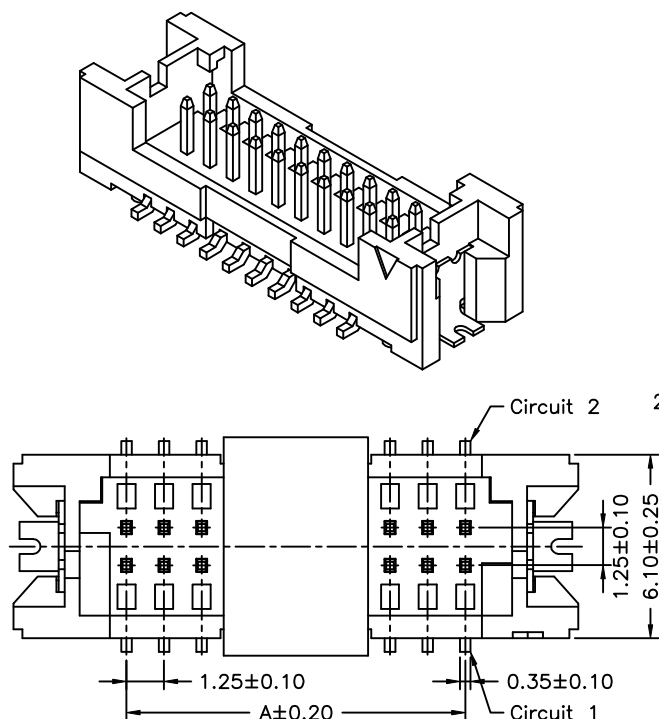


SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Solder Tabs: Brass/Tin-plated
Cap: Nylon 6T,UL94V-0
Wafer: Nylon 6T,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
DF13-VPC-2X05	5.00	12.50
DF13-VPC-2X10	11.25	18.75
DF13-VPC-2X15	17.50	25.00
DF13-VPC-2X20	23.75	31.25

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DF13-VPC-2Xxx-LF
SERIES
LEADFREE
2X05:10WAY
2X20:40WAY
CAP
POST
180°SMT

DESCRIPTION: 1.25mm PITCH 180° DUAL ROW WAFER SMT TYPE