

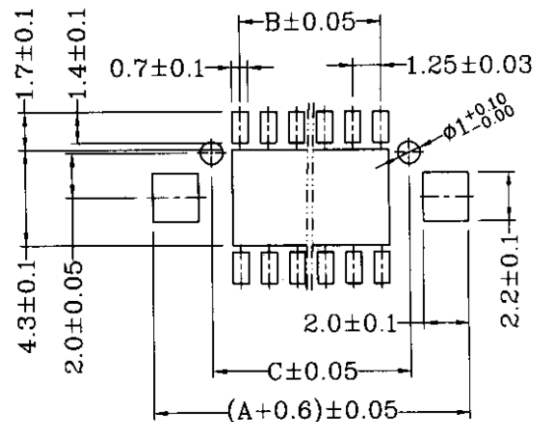
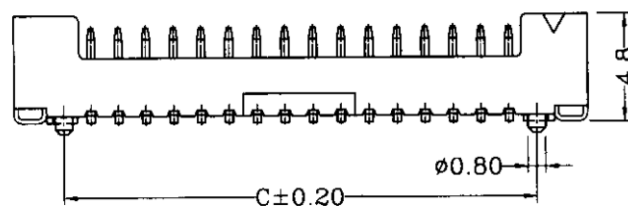


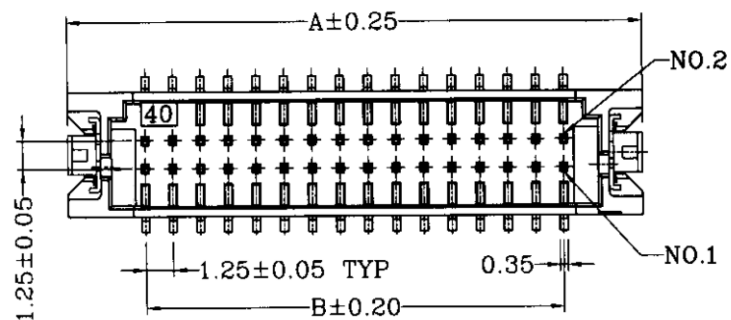

Material: *Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
 *Contact Post: Phosphor Bronze, Gold Plated
 *Solder Tab: 0.20mm^t Brass, Matte Tin Plated



Dimensional Information:

Circuits	Dimensions			Qty/Bag	Circuits	Dimensions			Qty/Bag
	A	B	C			A	B	C	
4	8.35	—	3.75	1000	24	20.85	13.75	16.25	1000
6	9.60	2.50	5.00	1000	26	22.10	15.00	17.50	1000
8	10.85	3.75	6.25	1000	28	23.35	16.25	18.75	1000
10	12.10	5.00	7.50	1000	30	24.60	17.50	20.00	1000
12	13.35	6.25	8.75	1000	32	25.85	18.75	21.25	1000
14	14.60	7.50	10.00	1000	34	27.10	20.00	22.50	1000
16	15.85	8.75	11.25	1000	36	28.35	21.25	23.75	1000
18	17.10	10.00	12.50	1000	38	29.60	22.50	25.00	1000
20	18.35	11.25	13.75	1000	40	30.85	23.75	26.25	1000
22	19.60	12.50	15.00	1000					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
 X ± 0.25
 .XX ± 0.15
 .XXX ± 0.08
 ANG ±

照片框




ORDER INFORMATION

DF13-VPCR-2Xxx-LF
 SERIES
 180°SMT
 REEL
 CAP
 POST
 LEADFREE
 2X02:04 WAY
 2X20:40 WAY

DESCRIPTION:




TAPING SPECIFICATIONS

Feeding Direction

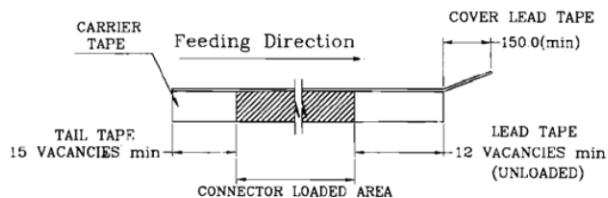


4 to 14 circuits

Feeding Direction

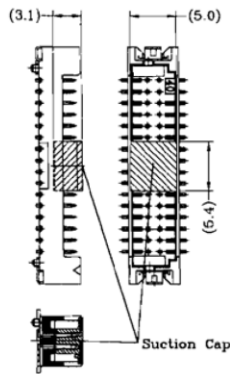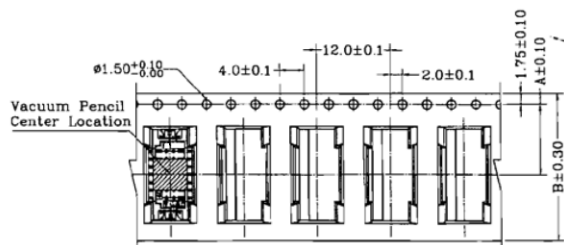

16 to 40 circuits

Feeding Direction

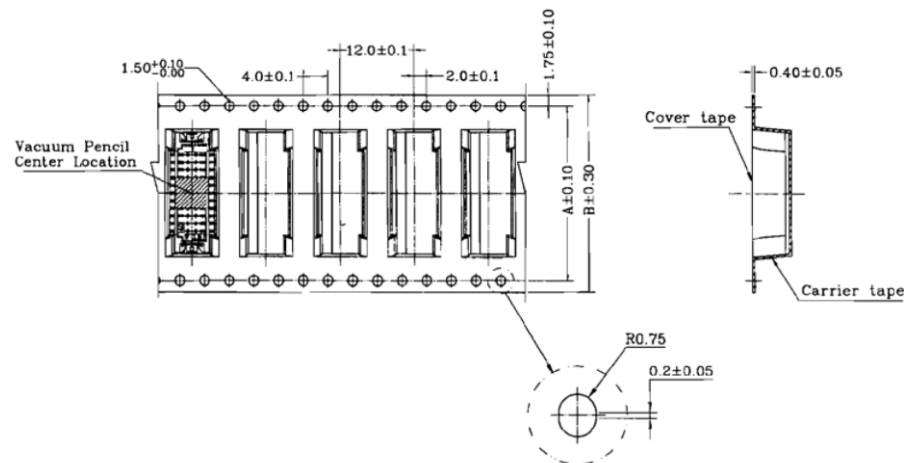

Circuits	Dimensions		Qty/Reel
	A	B	
4	11.50	24.00	1000
6	11.50	24.00	1000
8	11.50	24.00	1000
10	11.50	24.00	1000
12	11.50	24.00	1000
14	11.50	24.00	1000
16	28.40	32.00	1000
18	28.40	32.00	1000
20	28.40	32.00	1000
22	28.40	32.00	1000
24	40.40	44.00	1000
26	40.40	44.00	1000
28	40.40	44.00	1000
30	40.40	44.00	1000
32	40.40	44.00	1000
34	40.40	44.00	1000
36	40.40	44.00	1000
38	40.40	44.00	1000
40	40.40	44.00	1000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DF13-VPCR-2Xxx-LF

SERIES

11

11

11

11

11

LEADFREE

2X02:04 WAY

2X20:40 WAY

180°SMT

CAP

POST

DESCRIPTION: