

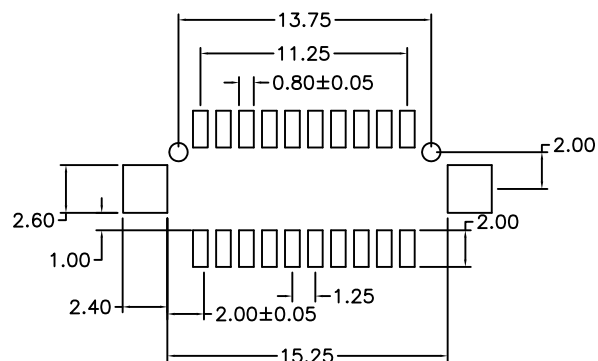
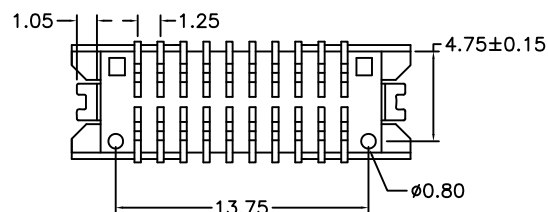
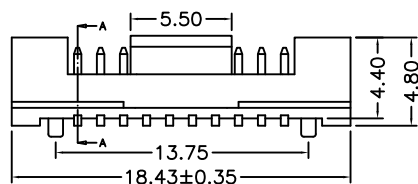


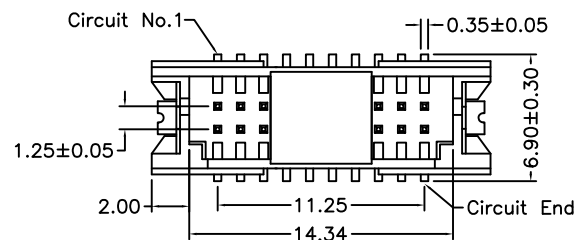

Recommended P.C.B Layout



SPECIFICATION

Pitch Between Poles : 1.25mm
 Current Rating : 1A AC/DC
 Voltage Rating : 100V AC/DC
 Contact Resistance : 20mΩMax
 Insulation Resistance : 500MΩMin.
 Withstand Voltage : 500V AC/MINUTE

FEATURES

Material : NYLON 6T UL94V-0
 Contact : 0.35mm(.014") Flat Pin,
 Phosphor Bronze, Gold Flash
 Mates With Tu1257 Series Dual Row Housing

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

DF13-VPGC-2X10-LF
 SERIES | CAP | 20 WAY | LEADFREE
 GOLD
 POST
 180°SMT

DESCRIPTION: 1.25mm WIRE TO BOARD CONNECTOR, CAP+TAPE REEL