

Features:




- 10, 20, 30, 40 circuits available
- .014"(0.35mm) square pin
- Pin Material: Gold-flash brass
- Insulation: Nylon 9T

Specification:

- Current rating : 1A AC, DC
- Voltage rating: 100V AC, DC
- Contact resistance: 20mΩ max.
- Dielectric withstanding voltage: 500V AC/minute
- Ambient temperature range: -25°C ~ 85°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C
10	5.00	8.10	12.2
20	11.25	14.35	18.5
30	17.50	20.60	24.8
40	23.75	26.85	31.1

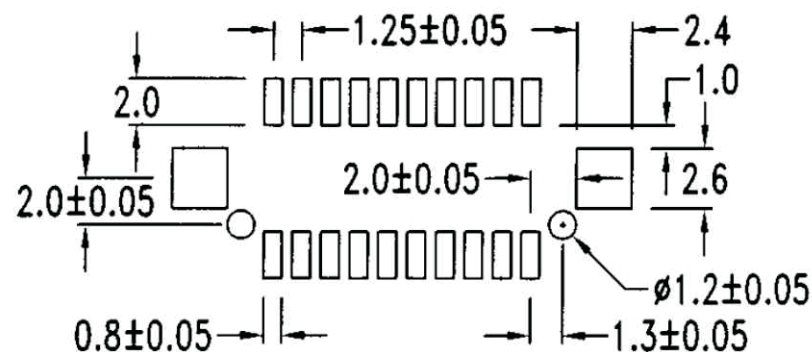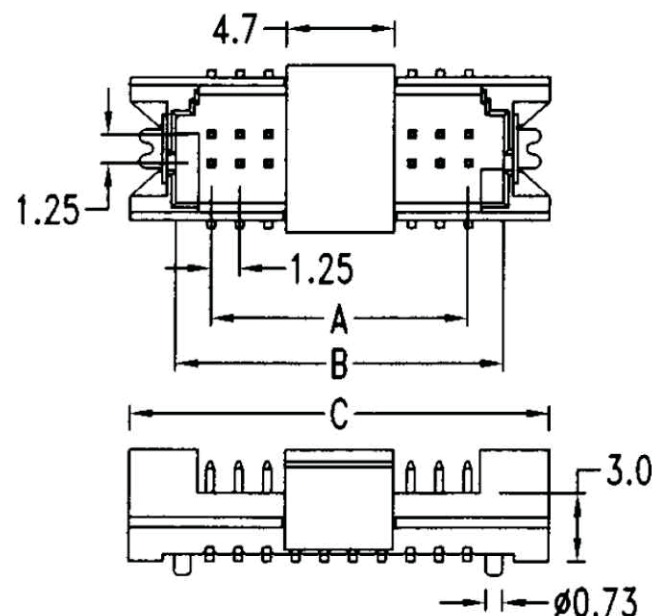

PCB layout: Solider side

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE


X. ±

.X ±

.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

DF13-VPGCR-2Xxx-LF

SERIES

180°SMT

POST

GOLD

REEL


CAP

LEADFREE

2X05:10WAY

2X20:40WAY

DESCRIPTION:

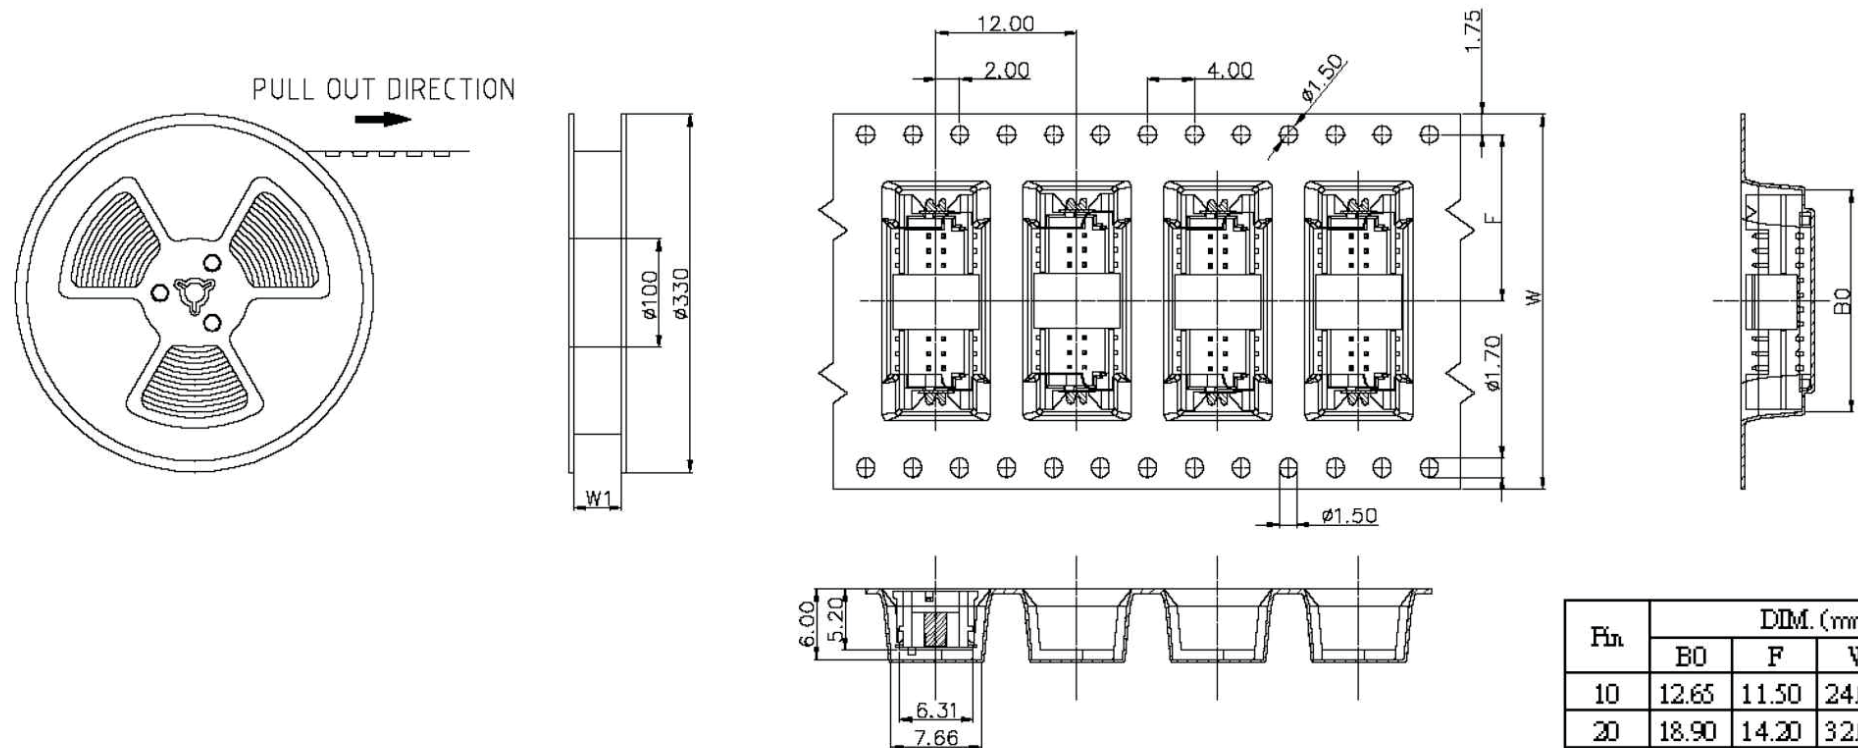

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20 .
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm.
3. MATERIAL : BLACK CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
4. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
5. THICKNESS : 0.35 ± 0.05 mm.
6. COMPONENT LOAD PER 19" REEL : 900 PCS.

FIN	DIM. (mm)			
	B0	F	W	W1
10	12.65	11.50	24.00	24.50
20	18.90	14.20	32.00	32.50
30	25.15	20.20	44.00	44.50
40	31.40	20.20	44.00	44.50

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION

DF13-VPGCR-2Xxx-LF

SERIES

180°SMT

POST

GOLD

REEL

CAP

GOLD



LEADFREE

2X05:10WAY

2X20:40WAY

DESCRIPTION:


PARTITION BOARD 2 PCS




PROTECT TAPE



INNER BAG




TRIANGLE BOARD 4 PCS

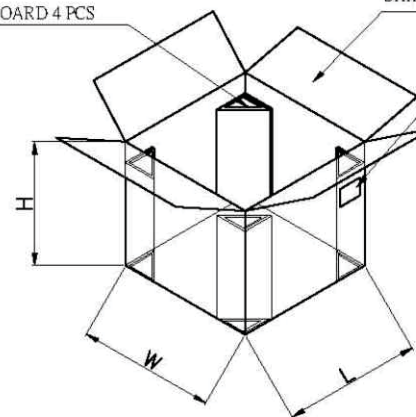

SHIPPING CARTON

TABEL



PACKING MATERIAL	
PART NAME	DIM. (mm)
REEL	Ø330*(W+0.5)
CARTON	350*350*340

PACKING CAPACITY			
PART NO.	PCS/RE	RE/BC	PCS/BC
2*5	900 PCS/RE	10 RE/BC	9,000 PCS/BC
2*10	900 PCS/RE	8 RE/BC	8,000 PCS/BC
2*15	900 PCS/RE	6 RE/BC	5,400 PCS/BC
2*20	900 PCS/RE	6 RE/BC	5,400 PCS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DF13-VPGCR-2Xxx-LF

SERIES

180°SMT

POST

REEL

CAP

GOLD

LEADFREE

2X05:10WAY

2X20:40WAY

DESCRIPTION: