


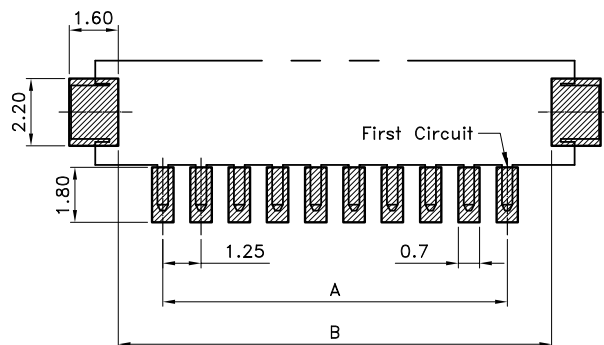



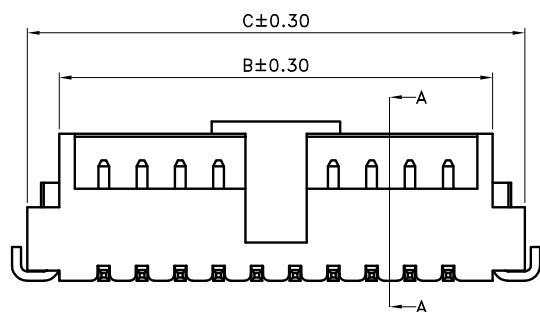


Recommended PCB Layout

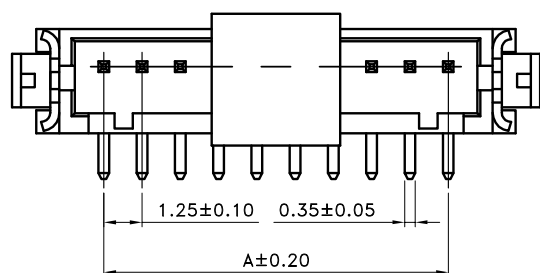


2 Circuit

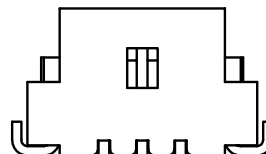

3 Circuit

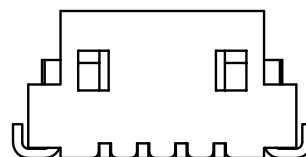

4-15 Circuit

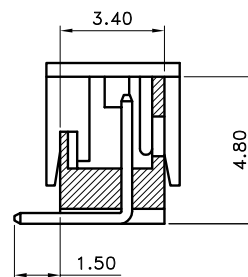

A-A Section plane

SPECIFICATIONS

- Current rating : 1A AC/DC
- Withstanding voltage : 500V AC/minute
- Insulation resistance : 500M Ω min.
- Temperature range : -35°C to +85°C
- Contact resistance : 30m Ω max.

- Poles : 02-15
- Material :
 1. Contact : Phos. Bronze
 2. Solder Nail : Phos. Bronze
 3. Base : Nylon 6T UL94V-0
- Plated : Refer the above options
- Q' ty : 1,000pcs./ Reel

Poles	Dimensions(mm)		
	A	B	C
2	1.25	4.15	6.25
3	2.50	5.40	7.50
4	3.75	6.65	8.75
5	5.00	7.90	10.00
6	6.25	9.15	11.25
7	7.50	10.40	12.50
8	8.75	11.65	13.75
9	10.00	12.90	15.00
10	11.25	14.15	16.25
11	12.50	15.40	17.50
12	13.75	16.65	18.75
13	15.00	17.90	20.00
14	16.25	19.15	21.25
15	17.50	20.40	22.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

照片框

ORDER INFORMATION

DF13-VXC-1Xxx-LF

SERIES

180°SMT

CAP

NON POST

LEADFREE

1X02:02WAY

1X15:15WAY

DESCRIPTION: 1.25mm Wire to Board Conn, 180° & SMT TYPE