

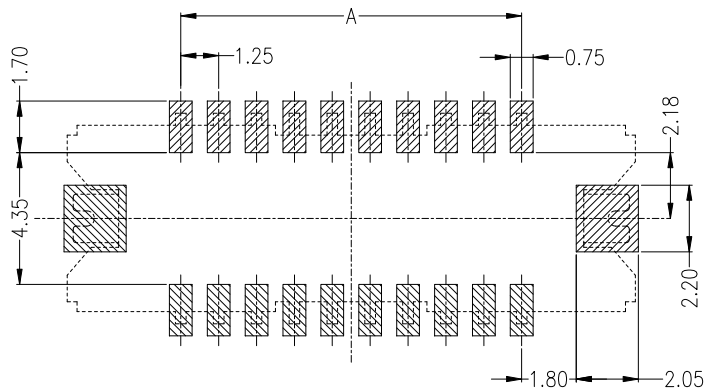
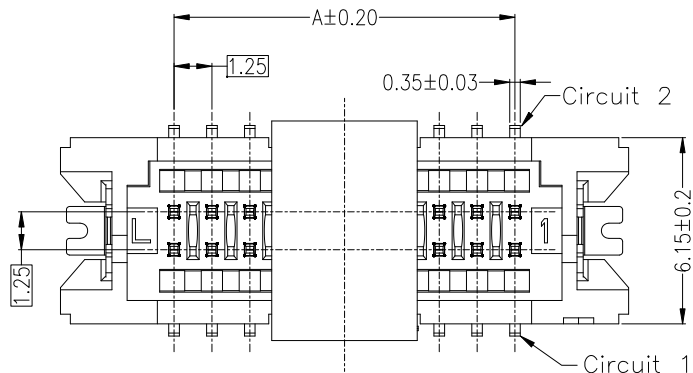






SUGGESTED PCB LAYOUT

Specifications:

Poles: 10 to 50
 Contact resistance: $\leq 30\text{m}\Omega$
 Insulation resistance: $\geq 500\text{M}\Omega$
 Rated voltage: 150V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Housing: PA9T UL94V-0, Natural (Beige)
 CAP: PA9T UL94V-0, Natural (Beige)
 Contacts: Brass/Gold-flash
 Solder Tabs: Brass/Gold-flash

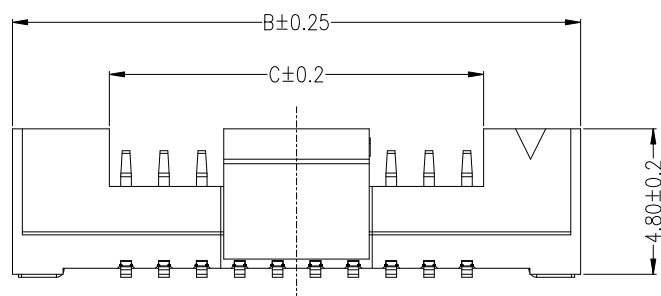

Circuits	Dimensions (mm)		
	A	B	C
2x05P	5.00	12.50	6.10
2x10P	11.25	18.75	12.35
2x15P	17.50	25.00	18.60
2x20P	23.75	31.25	24.85
2x25P	30.00	37.50	31.10

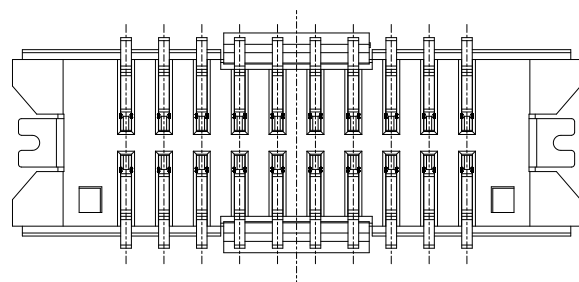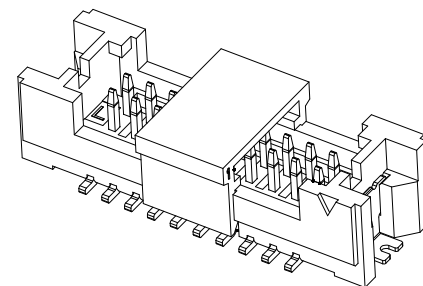

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DF13-VXGC-2Xxx-LF

SERIES

180°SMT

CAP

GOLD

NON POST

LEADFREE

2X05:10WAY

2X25:50WAY

DESCRIPTION: 1.25 Pitch Wafer 180° SMT