
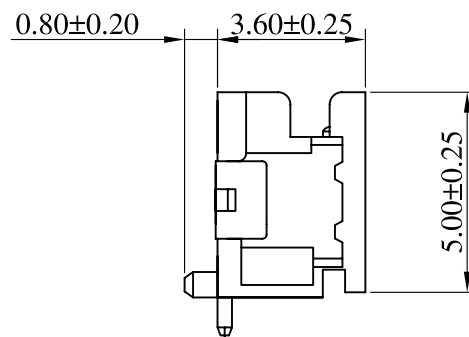
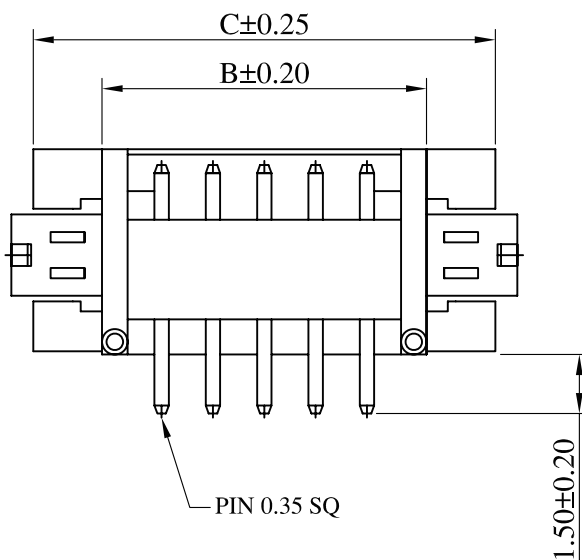
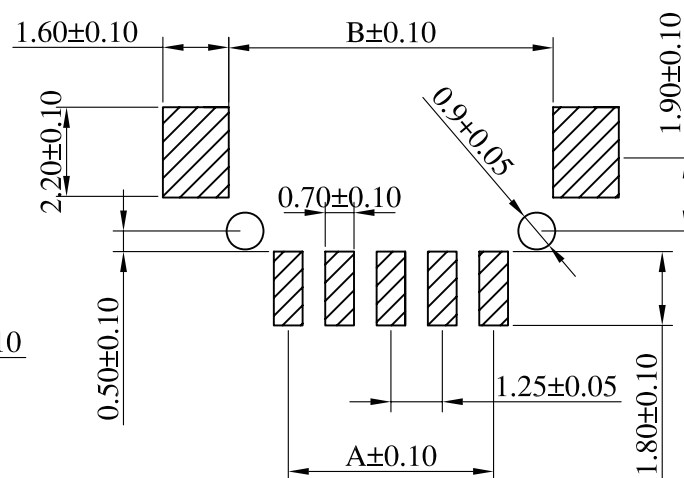


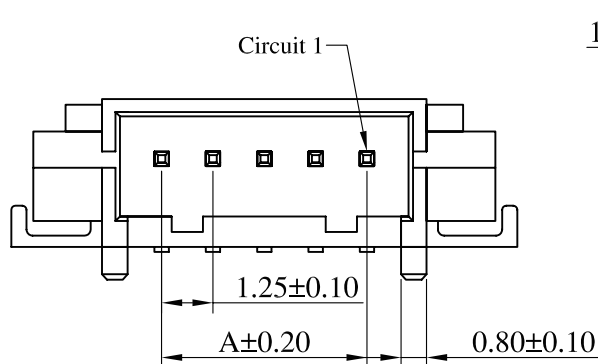

SPECIFICATIONS

Current Rating : 1A AC,DC

Voltage Rating : 100V AC,DC

Temperature Range : -25°C~+85°C

Contact Resistance : 20mΩ Max.

Insulation Resistance : 500MΩ Min.

Withstanding Voltage : 500V AC/Min.

Pin Material : Phosphor Bronze/gold-plated

Solder Tabs : Brass/gold-plated

Material : Nylon 6T, UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
DF13-WPG-1X02	1.25	4.15	5.65
DF13-WPG-1X03	2.50	5.40	6.90
DF13-WPG-1X04	3.75	6.65	8.15
DF13-WPG-1X05	5.00	7.90	9.40
DF13-WPG-1X06	6.25	9.15	10.65
DF13-WPG-1X07	7.50	10.40	11.90
DF13-WPG-1X08	8.75	11.65	13.15
DF13-WPG-1X09	10.00	12.90	14.40
DF13-WPG-1X10	11.25	14.15	15.65
DF13-WPG-1X11	12.50	15.40	16.90
DF13-WPG-1X12	13.75	16.65	18.15
DF13-WPG-1X13	16.25	19.15	20.65
DF13-WPG-1X14	17.50	20.40	21.90

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DF13-WPG-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X14:14WAY
GOLD PLATED
POST
90°SMT

DESCRIPTION: 1.25mm Wire-to-Board Header SMD 90° TYPE