


- Material: * Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
 * Contact Post: 0.35mm^t Phosphor Bronze, Matte Tin Plated.
 * Solder Tab: 0.20mm^t Brass, Matte Tin Plated.

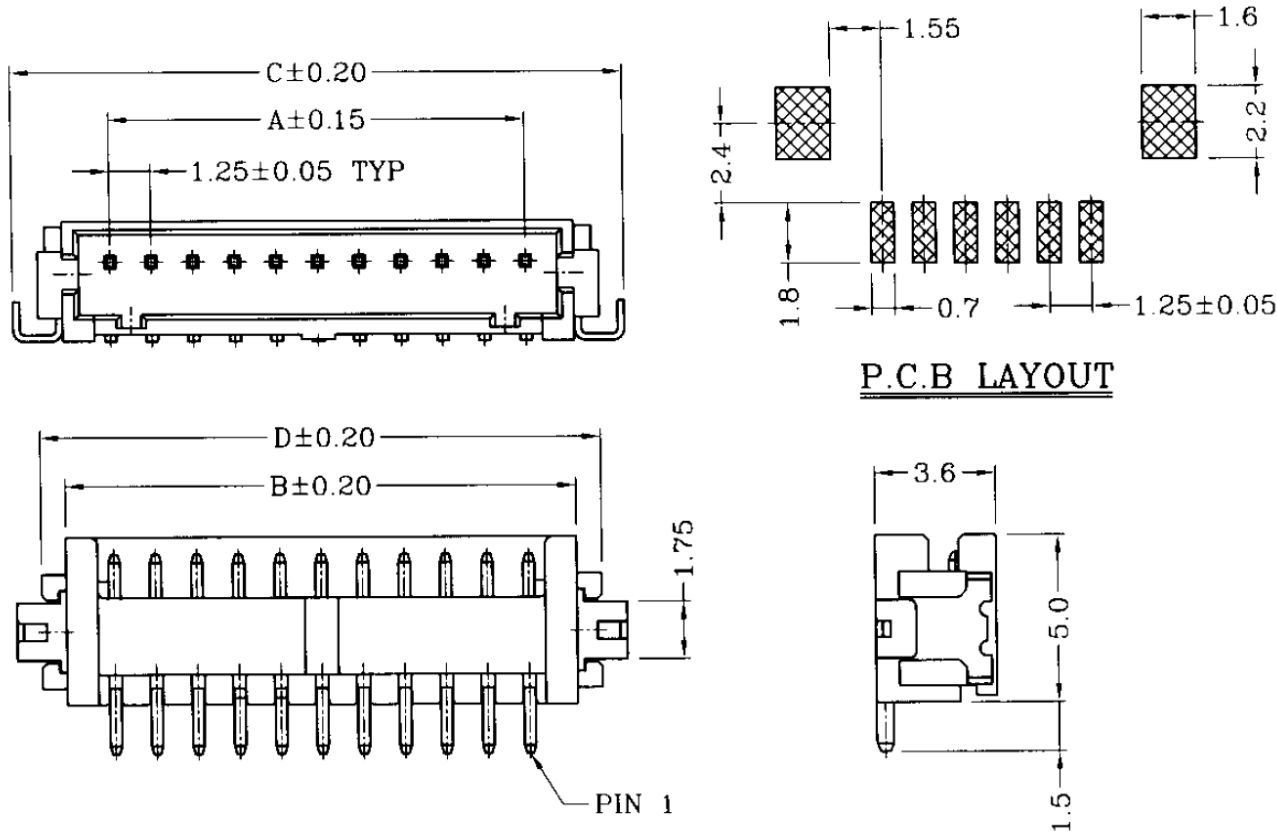

P.C.B LAYOUT

Dimensional & Ordering Information:

Circuits	Dimensions				Qty/Reel
	A	B	C	D	
2	—	4.15	7.15	5.65	1000 Pcs
3	2.50	5.40	8.40	6.90	1000 Pcs
4	3.75	6.65	9.65	8.15	1000 Pcs
5	5.00	7.90	10.90	9.40	1000 Pcs
6	6.25	9.15	12.15	10.65	1000 Pcs
7	7.50	10.40	13.40	11.90	1000 Pcs
8	8.75	11.65	14.65	13.15	1000 Pcs
9	10.00	12.90	15.90	14.40	1000 Pcs
10	11.25	14.15	17.15	15.65	1000 Pcs
11	12.50	15.40	18.40	16.90	1000 Pcs
12	13.75	16.65	19.65	18.15	1000 Pcs
13	15.00	17.90	20.90	19.40	1000 Pcs
14	16.25	19.15	22.15	20.65	1000 Pcs
15	17.50	20.40	23.40	21.90	1000 Pcs

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.08
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

DF13-WX-1Xxx-LF

SERIES | LEADFREE
 1X02:02WAY
 1X15:15WAY
 NON POST
 90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: