
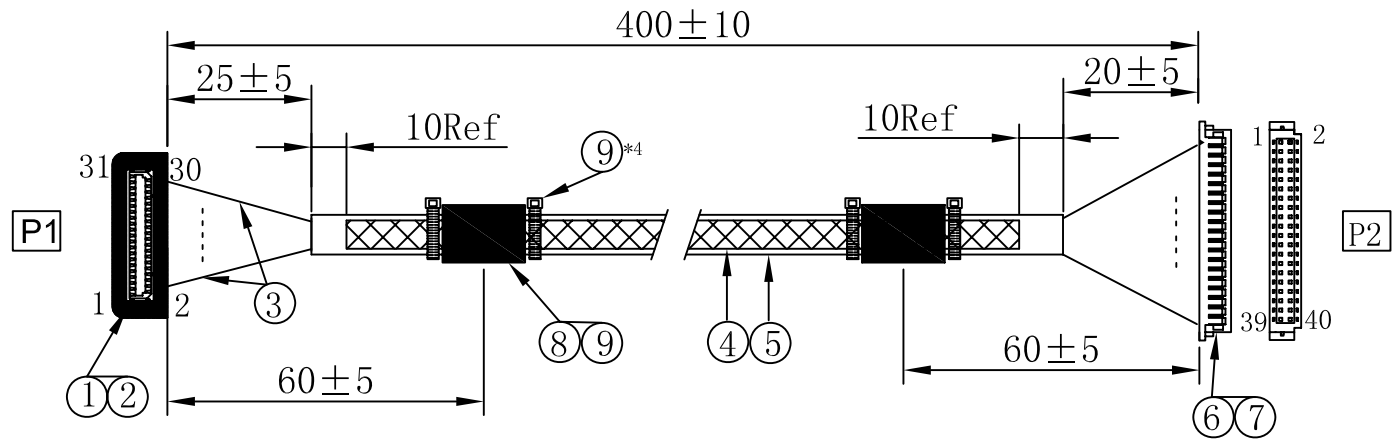


WIRE RUN LIST

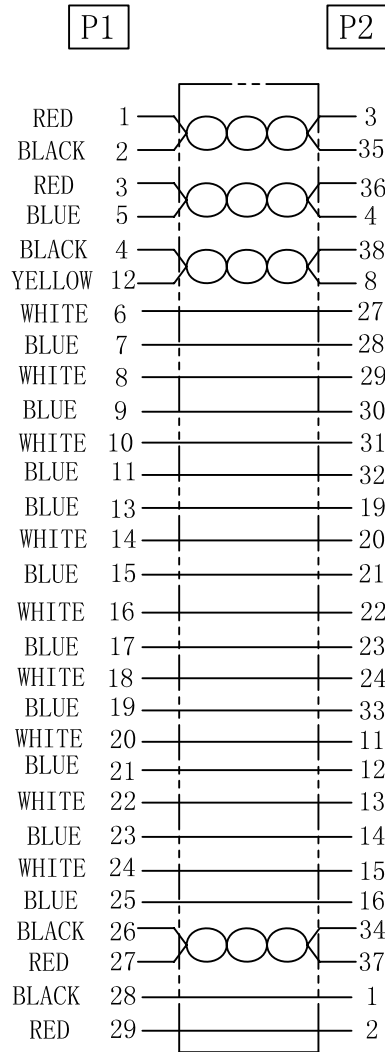

测试条件:

1. 导通阻抗: 5 Ω /MAX
2. 绝缘阻抗: 5M Ω /MIN
3. 测试电压: 200V DC

RoHS Compliant

| 10 | 4 | | CABLE TIE | W=10 L=100mm TRANSPARENT | |
|----|------|--------------|---------------------------------|-----------------------------|--------|
| 9 | 2 | | UL HEAT SHRINK TUBE COLOR=BLACK | 长园: 25薄壁 | |
| 8 | 2 | | CORD | 磁丰: L:25*OD:18.6*ID:10.16 | |
| 7 | 29 | | TERMINAL | 坤特: 仿DF13-T | |
| 6 | 1 | | HOUSING 2*20P | 坤特: 仿DF13-2*20P | |
| 5 | 1 | | ACETATE CLOTH TAPE | 富立宽: W=30 BLACK | |
| 4 | 1 | | BRAID WEBBING | 精英: 24/7/0.12 | |
| 3 | 9 | | UL1571#28AWG7/0.127 OD:0.6 | 众达: WHITE | |
| | 1 | | UL1571#28AWG7/0.127 OD:0.6 | 众达: YELLOW | |
| | 3/1 | | UL1571#28AWG7/0.127 OD:0.6 | 众达: CO | |
| | 1/3 | | UL1571#28AWG7/0.127 OD:0.6 | 众达: RED | |
| | 10/1 | | UL1571#28AWG7/0.127 OD:0.6 | 众达: BLUE | |
| 2 | 4g | | PVC料 | 45P BLACK | |
| 1 | 1 | | Connector 31 | 靖兴: DF9-31S-1V MOLDING TYPE | |
| NO | QTY | PARTS NUMBER | NAME | SPECIFICATION | REMARK |

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. DF13DF9-B2031-F40C

DWG NO. DF13DF9-B2031-F40C

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE