

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: 20m Ω Max.


Insulation Resistance: 500M Ω Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin-plated



Solder Tabs: Brass/Tin-plated

Material: Nylon 6T,UL94V-0

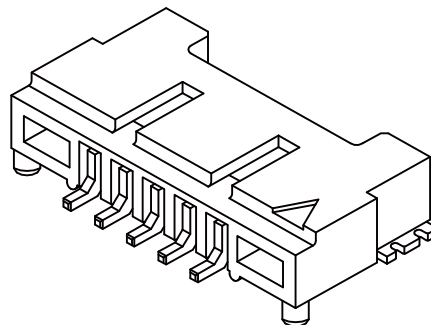


Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
DF14-WP-02	1.25	7.45
DF14-WP-03	2.50	8.70
DF14-WP-04	3.75	9.95
DF14-WP-05	5.00	11.20
DF14-WP-06	6.25	12.45
DF14-WP-07	7.50	13.70
DF14-WP-08	8.75	14.95
DF14-WP-09	10.00	16.20
DF14-WP-10	11.25	17.45
DF14-WP-11	12.50	18.70
DF14-WP-12	13.75	19.95
DF14-WP-13	15.00	21.20
DF14-WP-14	16.25	22.45
DF14-WP-15	17.50	23.70
DF14-WP-20	23.75	29.95
DF14-WP-25	30.00	36.20
DF14-WP-30	36.25	42.45

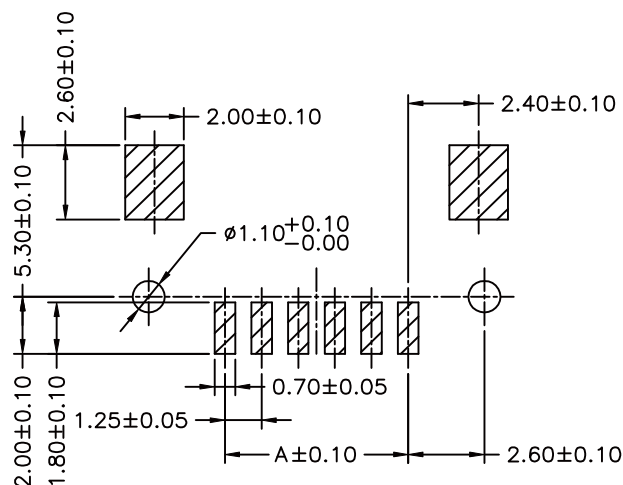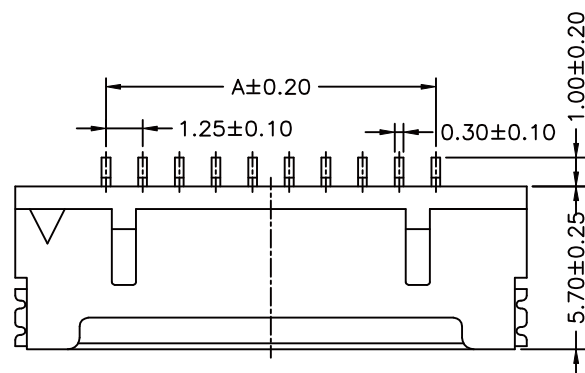

P.C.B. LAYOUT

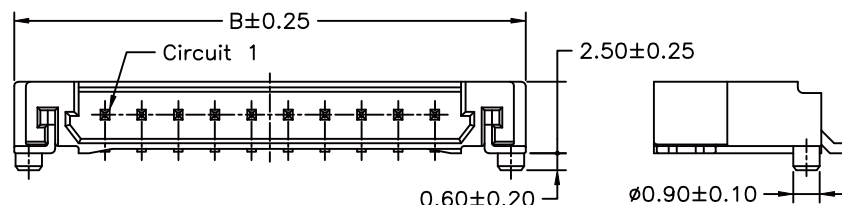

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DF14-WP-xx-LF

SERIES | LEADFREE
02-30WAY
POST
90°SMT

DESCRIPTION: