

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: 20m Ω Max.


Insulation Resistance: 500M Ω Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin-plated



Solder Tabs: Brass/Tin-plated

Material: Nylon 6T,UL94V-0


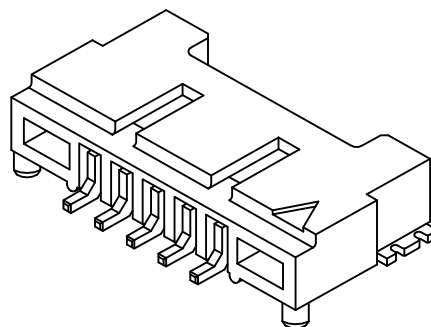


Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
DF14-WPR-02	1.25	7.45
DF14-WPR-03	2.50	8.70
DF14-WPR-04	3.75	9.95
DF14-WPR-05	5.00	11.20
DF14-WPR-06	6.25	12.45
DF14-WPR-07	7.50	13.70
DF14-WPR-08	8.75	14.95
DF14-WPR-09	10.00	16.20
DF14-WPR-10	11.25	17.45
DF14-WPR-11	12.50	18.70
DF14-WPR-12	13.75	19.95
DF14-WPR-13	15.00	21.20
DF14-WPR-14	16.25	22.45
DF14-WPR-15	17.50	23.70
DF14-WPR-20	23.75	29.95
DF14-WPR-25	30.00	36.20
DF14-WPR-30	36.25	42.45

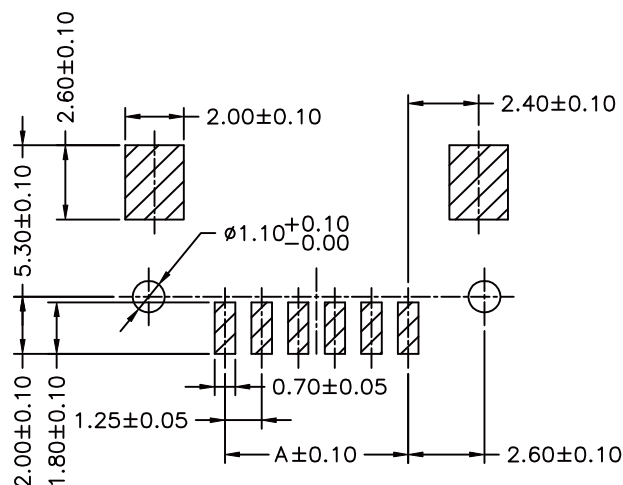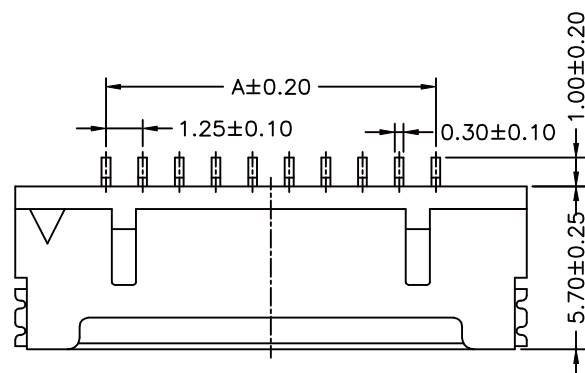

P.C.B. LAYOUT

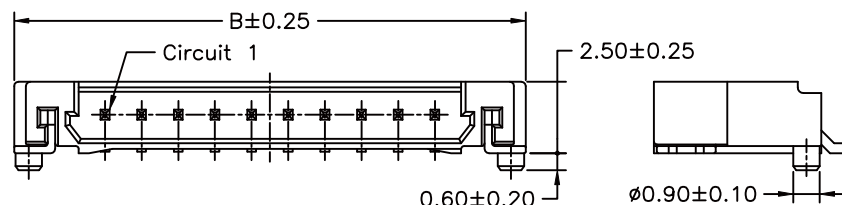

RoHS Compliant

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com


ORDER INFORMATION

DF14-WPR-xx-LF


SERIES | | | LEADFREE
| | | 02~30WAY
| | | REEL
| | | POST
| | | 90°SMT

DESCRIPTION:


2~7 Contacts

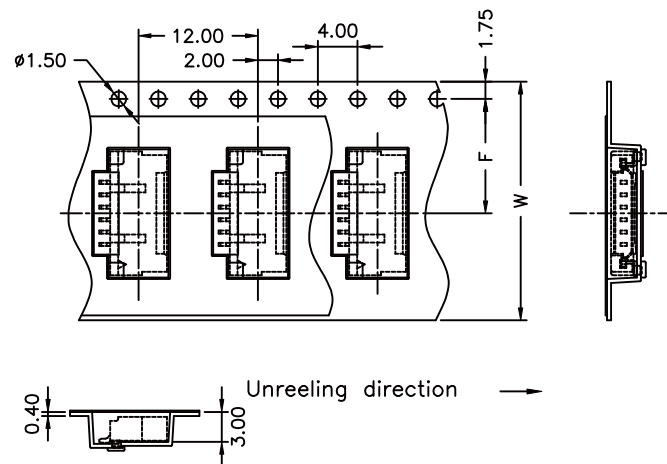

8~30 Contacts

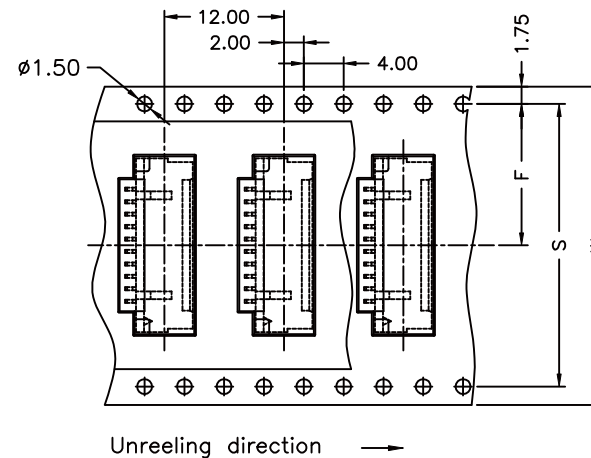

Number of Contacts	W±0.3	F±0.15	S±0.1	Q'ty/Reel
2P	16	7.5	---	1,000
3P	16	7.5	---	1,000
4P	24	11.5	---	1,000
5P	24	11.5	---	1,000
6P	24	11.5	---	1,000
7P	24	11.5	---	1,000
8P	32	14.2	28.40	1,000
9P	32	14.2	28.40	1,000
10P	32	14.2	28.40	1,000
11P	32	14.2	28.40	1,000
12P	32	14.2	28.40	1,000
13P	32	14.2	28.40	1,000
14P	44	20.2	40.40	1,000
15P	44	20.2	40.40	1,000
20P	44	20.2	40.40	1,000
25P	56	26.2	52.40	1,000
30P	56	26.2	52.40	1,000

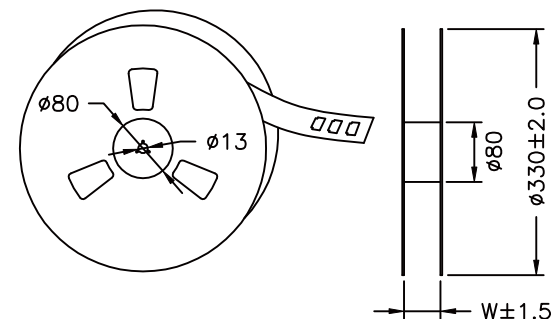

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X ± 0.30
.X ± 0.30
.XX ± 0.20
.XXX ± 0.20
ANG ± 1°



ORDER INFORMATION

DF14-WPR-xx-LF

SERIES

LEADFREE
02~30WAY

REEL
POST
90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: