
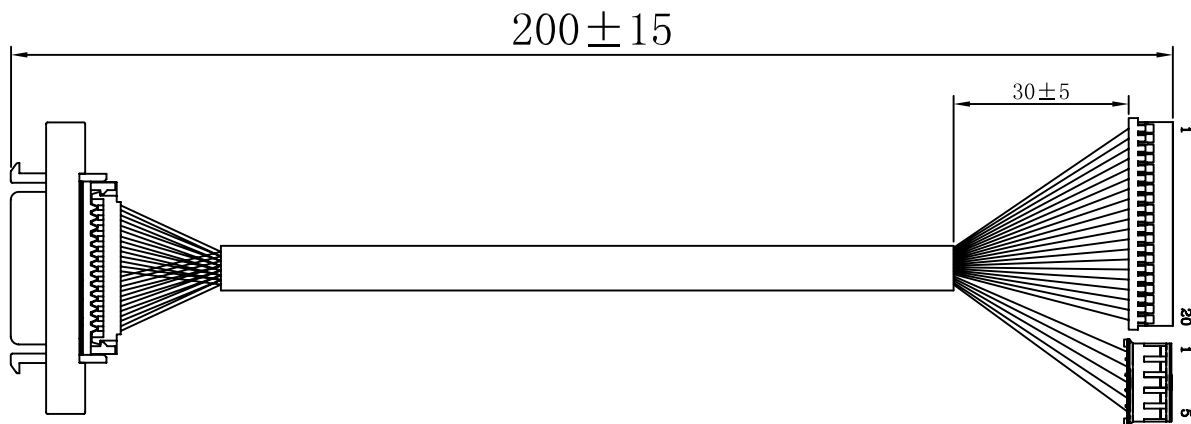


FMC26FL




P2 DF14-20S

P3 JST2.0-5PH

P1 HDCEN26P M(FMC26FL)

WIRING DIAGRAM

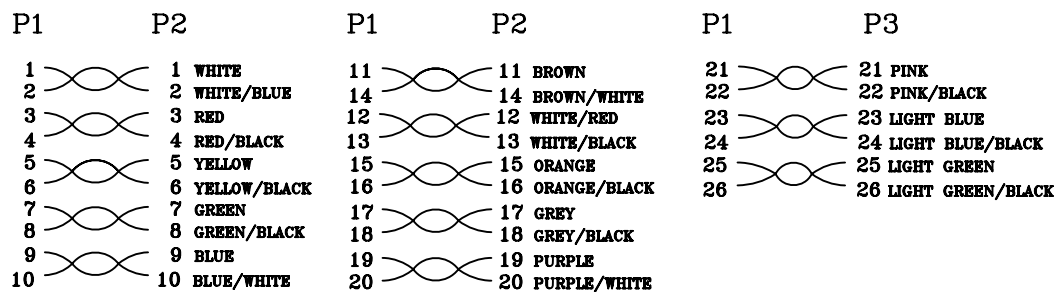

PACKAGE:

6	TREMINAL	5	PCS	JST2.0-TP
5	TREMINAL	20	PCS	DF14-TP
4	HOUSING	1	PCS	JST2.0-5PH
3	HOUSING	1	PCS	DF14-20S
2	CONNECTOR	1	PCS	Half Pitch Centronic 26P/Female Conn. Bracket with Latch Block Insulator: Black P.B.T Contact: Phosphor Bronze 5U'
1	CABLE	1	PCS	UL2990 (28AWGx13Pair+AEB) ID:0.62 OD:7.0mm Color: Beige L: 20CM
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. DF14HPCPH-20R1-F20C

DWG NO. DF14HPCPH-20R1-F20C

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

HALF PITCH 26P F/DF14 20P/2.0 PH 5P
L:200mm BEIGE

AREA

REVISIONS

HK

DATE

焯倫股份有限公司