



21P~30P
SCALE 0.8:1










02P

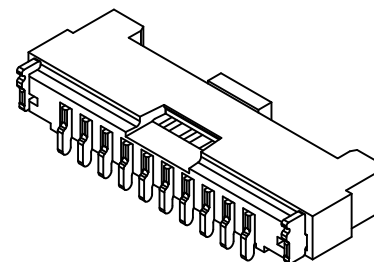

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold-flash
Nickel-plated 30u" ↑
Solder Tabs: Brass/Gold-flash
Nickel-plated 30u" ↑
Material: LCP/Nylon 6T,UL94V-0
Color: Natural(Black)

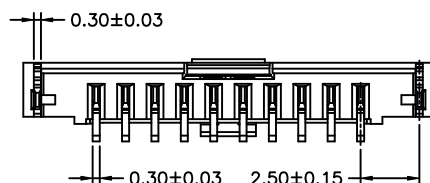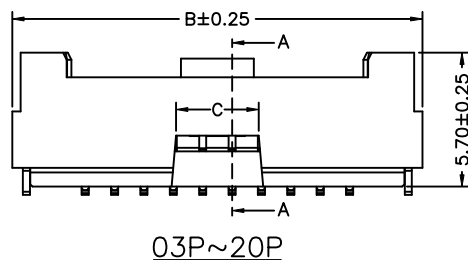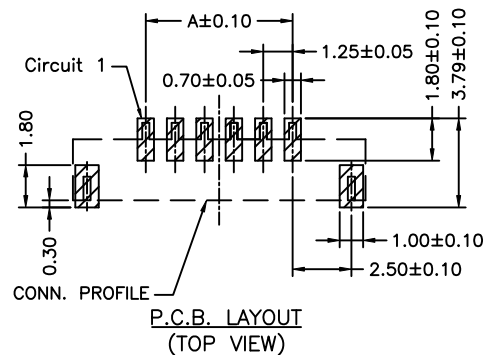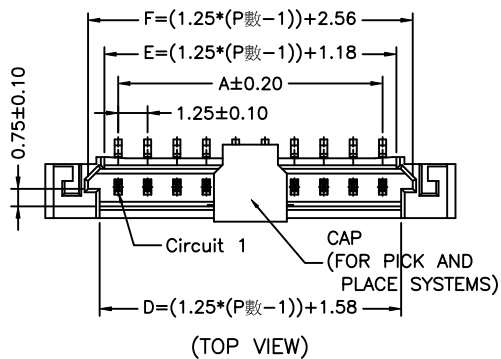

Circuit No.	Dimensions		
	A	B	C
02P	1.25	7.45	3.50
03P	2.50	8.70	3.50
04P	3.75	9.95	3.50
05P	5.00	11.20	3.50
06P	6.25	12.45	3.50
07P	7.50	13.70	3.50
08P	8.75	14.95	3.50
09P	10.00	16.20	3.50
10P	11.25	17.45	3.50
11P	12.50	18.70	5.00
12P	13.75	19.95	5.00
13P	15.00	21.20	5.00
14P	16.25	22.45	5.00
15P	17.50	23.70	5.00
20P	23.75	29.95	5.00
25P	30.00	36.20	6.00
30P	36.25	42.45	6.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

$X, \pm$
 $.X \pm 0.25$
 $.XX \pm 0.15$
 $.XXX \pm 0.05$
 $ANG \pm$

照片框

ORDER INFORMATION

DF14L-VXC-xx-LF

SERIES
 LEADFREE
 02~30WAY
 CAP
 NON POST
 180°SMT

DESCRIPTION: 1.25mm PITCH 180°WAFER-SMT TYPE, ULTRA LOW PROFILE, WITHOUT BOSS