


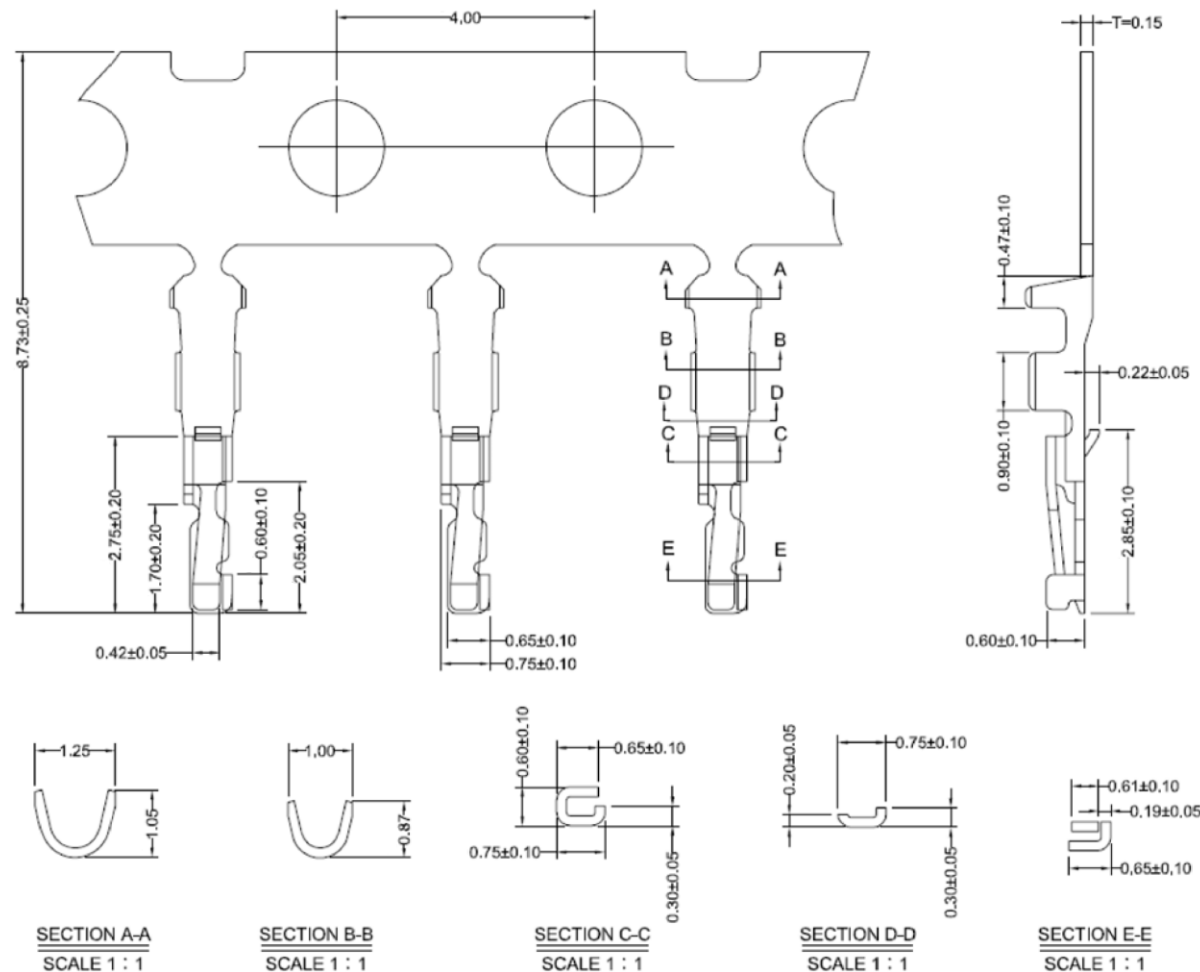

■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ

AWG #28~ #32

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
DF19-T-28	AWG#28-#32	0.6mm(max)	Phosphor Bronze	Tin-plated	15,000pcs

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

X. ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ± 1°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DF19-T-28-LF

SERIES | LEADFREE
28~32 AWG
TERMINAL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: