

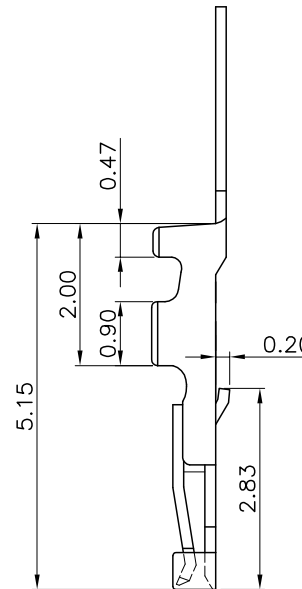
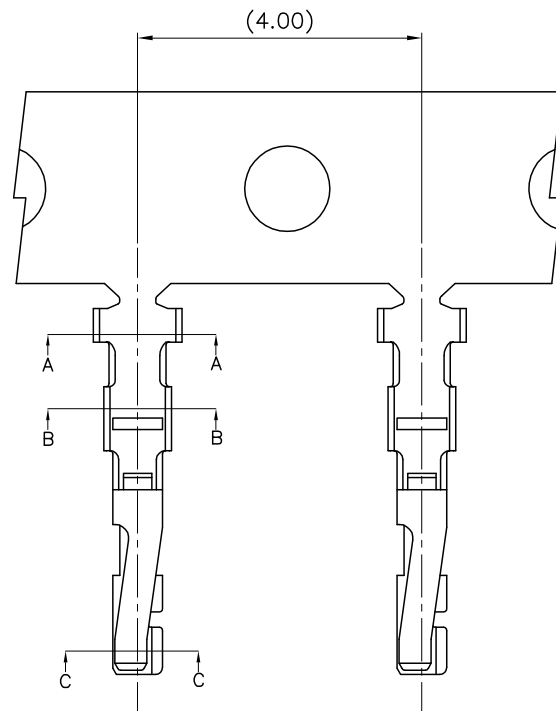


Section A-A



Section B-B



Section C-C(SCALE 2:1)

NOTES:

1. MATERIAL: PHOSPHOR BRONZE, $t=0.15\text{mm}$
2. APPLICABLE WIRE RANGE: SEE CONTACT INFORMATION
3. INSULATION O.D.: SEE CONTACT INFORMATION

CONTACT INFORMATION:

Part No.	Wire Range	Insulation O.D.	DIM.(mm)	
			A	B
DF19-Tx-28	AWG#28~#30	$\phi 0.50\sim 0.60\text{mm}$	1.05	1.15
DF19-Tx-32	AWG#32~#34	$\phi 0.30\sim 0.40\text{mm}$	0.95	0.90

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

DF19-Tx-xx-LF
SERIES | LEADFREE
28:28~30AWG
32:32~34AWG
BLANK:TIN
G:GOLD
TERMINAL





DESCRIPTION: WIRE TO BOARD, PITCH 1.00mm, CRIMP TYPE, CONTACT

PCAING MATERIAL

PART NAME	DIM(mm)
CARTON	470*470*210

PCAING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
DF19-Tx-32	20,000	6	120,000
DF19-Tx-28	15,000	8	120,000

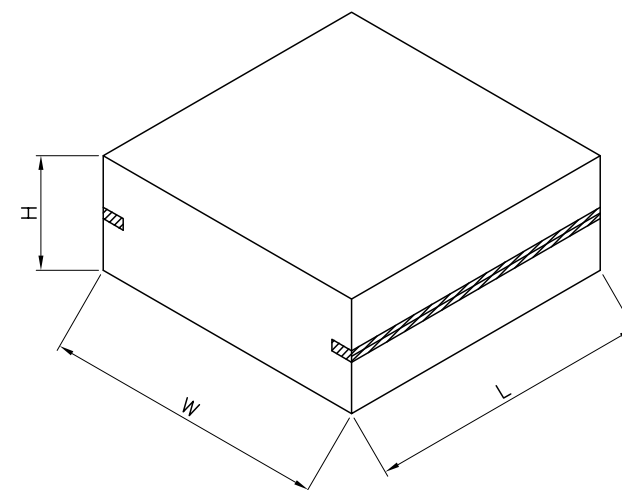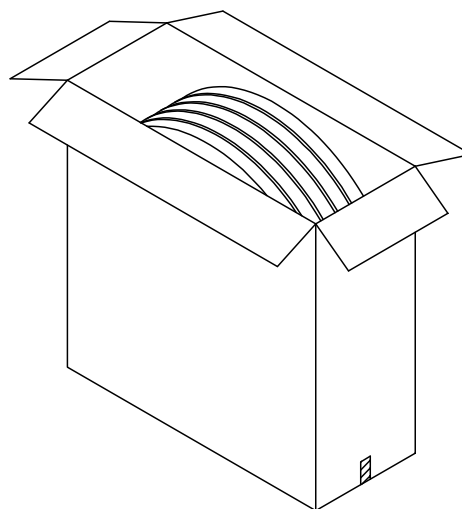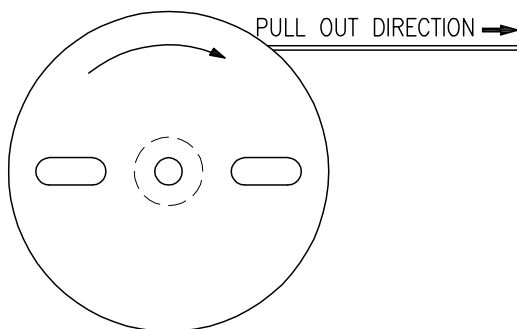

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

DF19-Tx-xx-LF
SERIES T LEADFREE
28:28~30AWG
32:32~34AWG
BLANK:TIN
G:GOLD
TERMINAL

DESCRIPTION: WIRE TO BOARD, PITCH 1.00mm, CRIMP TYPE, CONTAC