
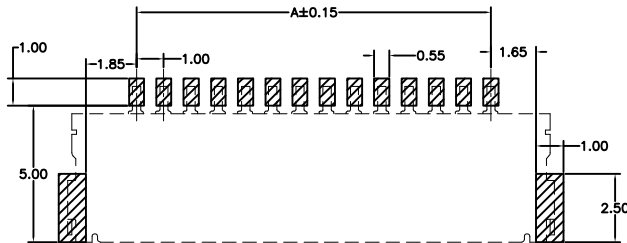


Mating Condition(REF.)

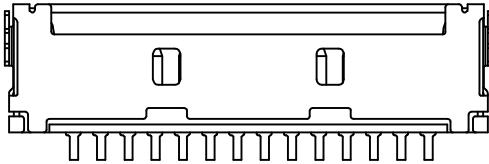

Toerance:±0.05

Recommended P.C.B Layout (Top View)

■SPEC.:

- Rated Voltage:100V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:300V AC/minute
- Contact Resistance:30mΩ max
- Insulation Resistance:500MΩ min
- Temperature Range:-35℃~+85℃

■Material and finish

- Insulator:PA9T,UL94V-0
Color:Black
- Contact Pin:Copper alloy
Finish:Gold flash over Nickel
- Shell:Copper alloy
Finish:Solder Area Gold flash over Nickel
- QTY.:2.5KPCS/Reel

Poles	Dimensions(mm)	
	A	B
08	7.00	11.55
14	13.00	17.55
20	19.00	23.55
30	29.00	33.55

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION


X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION


DF19-WXR-xx-LF
SERIES | | | LEADFREE
| | | 08-30WAY
| | | REEL
| | | NON POST
| | | 90°SMT

DESCRIPTION: 1.00MM RIGHT ANGLE SMT TYPE WIRE TO BOARD CONNECTOR

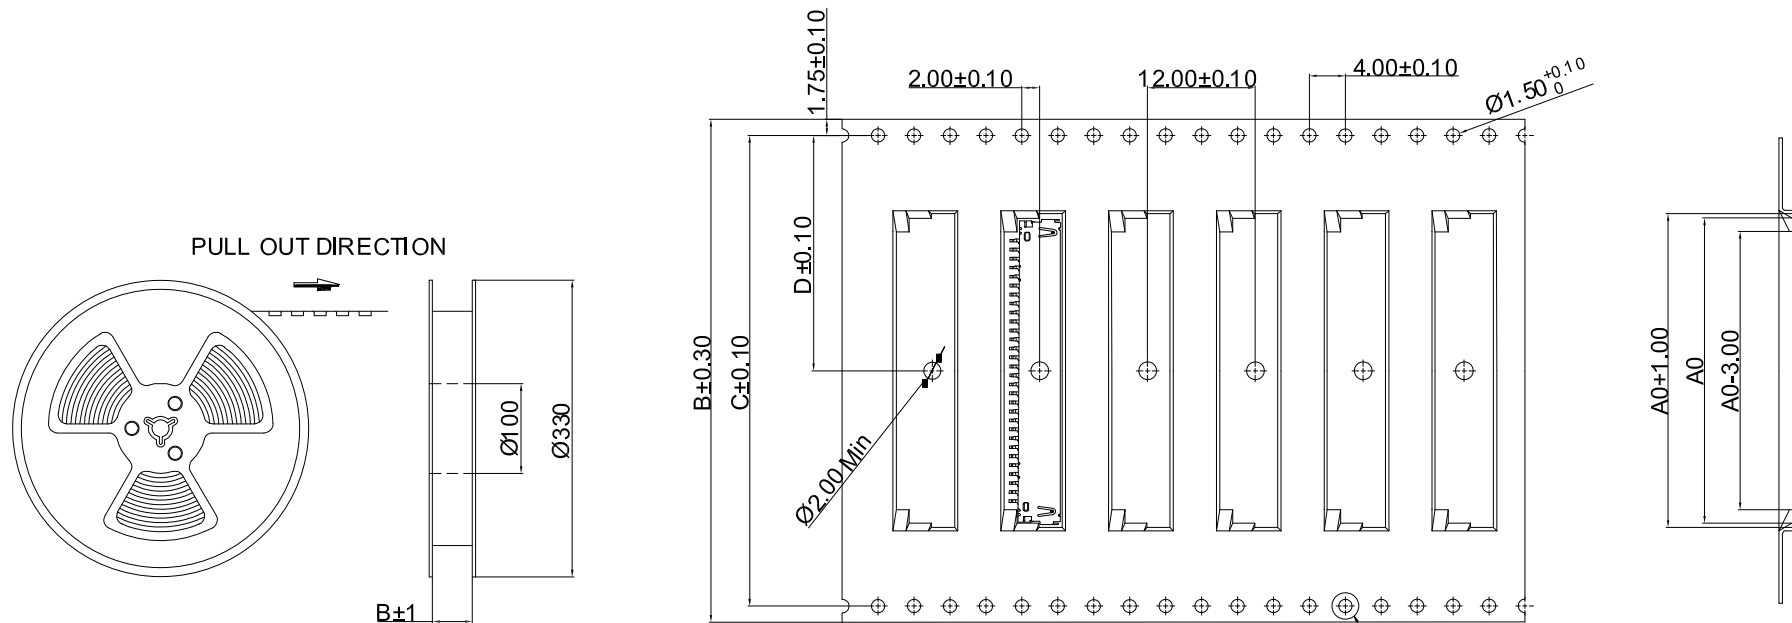

NOTES:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 250mm.
3. Material: Black Conductive Polystyrene Alloy (UP-5000)
4. Thickness: $0.35 \pm 0.05 \text{ mm}$.
5. Packing length per 22 reel: 92.5 Meters.
6. Component load per 13 reel: 2500 pcs.
7. Product conveyor belt, 160mm reserved at the front and 440mm reserved in the direction of pulling out at the back.



30	33.95	56.00	52.40	26.20
20	23.95	44.00	40.40	20.20
14	17.95	32.00	28.40	14.20
CKT	A	B	C	D

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, \pm
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG \pm

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

照片框

ORDER INFORMATION

DF19-WXR-xx-LF

SERIES LEADFREE
08-30WAY
REEL
NON POST
90°SMT

DESCRIPTION: 1.00MM RIGHT ANGLE SMT TYPE WIRE TO BOARD CONNECTOR

煜倫股份有限公司

www.morethanall.com