


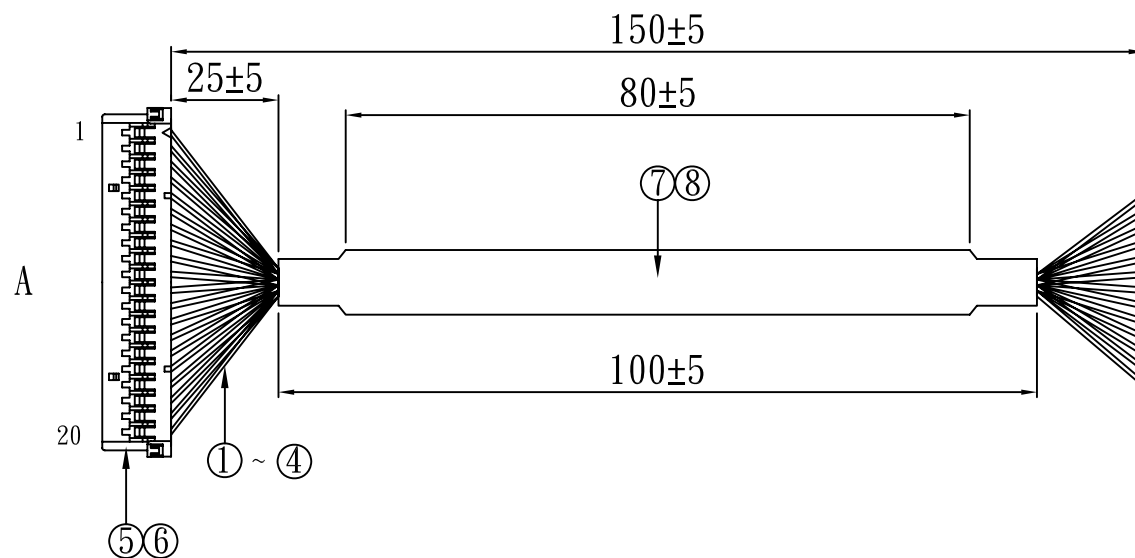

A	線色	B
1	黑	切齊
2	黑	切齊
對絞	5 藍	切齊
對絞	6 白	切齊
對絞	8 藍	切齊
對絞	9 白	切齊
對絞	11 藍	切齊
對絞	12 白	切齊
對絞	14 藍	切齊
對絞	15 白	切齊
17	黑	切齊
18	黑	切齊
19	黑	切齊
3	黑	編織
4	黑	
7	黑	
10	黑	
13	黑	
16	黑	
20	黑	

注：第3, 4, 7, 10, 13, 16, 20焊接在編織網上

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL1571 #28 OD:0.6 黑	7PCS	E108485
2	WIRE:	UL1571 #28 OD:0.6 黑	5PCS	E108485
3	WIRE:	UL1571 #28 OD:0.6 藍	4PCS	E108485
4	WIRE:	UL1571 #28 OD:0.6 白	4PCS	E108485
5	HOUSING:	DF19-HM-20	1PCS	E186792
6	TERMINAL:	DF19-TG-28	20PCS	E186792
7	編織網:	40*80mm 黑	1PCS	
8	醋酸膠布:	W:20*L:100mm	1PCS	
9				
10				
11				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DF19X1-200028M1S1-F15C-LF

SERIES

20 WAY

28 AWG

SHIELD
METAL

LEADFREE
14WAY
150mm
FEMALE

DESCRIPTION: