










# WIRE RUN LIST

**P1** **P2**

- 红 1 ————— 1
- 红 2 ————— 2
- 黑 3 ————— 3
- 黑 4 ————— 4
- 白 5  5
- 蓝 6  6
- 黑 7 ————— 7
- 白 8  8
- 蓝 9  9
- 黑 10 ————— 10
- 白 11  11
- 蓝 12  12
- 黑 13 ————— 13
- 白 14  14
- 蓝 15  15
- 黑 16 ————— 16
- 黑 19 ————— 19
- 黑 20 ————— 20


**P1**

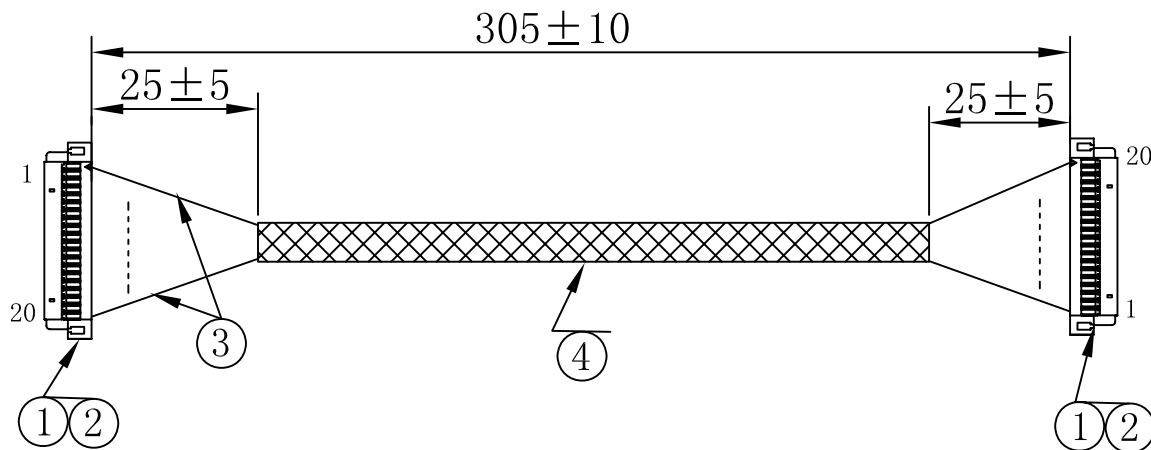

**P2**

DF19X2-2020M-F12N-LF  
LEADFREE

RoHS Compliant


注：1. 对绞 

- 测试条件：
- 100%做导通测试
  - 导通阻抗：5Ω/MAX
  - 绝缘阻抗：5MΩ/MIN
  - 测试电压：200V DC

项目	用量	材料代号	品名	厂商规格	备注
4	1		醋酸胶布	富立宽:W=30	
3	4		UL1571#28AWG7/0.127 OD: 0.6	众达:蓝色	
	4		UL1571#28AWG7/0.127 OD: 0.6	众达:白色	
	2		UL1571#28AWG7/0.127 OD: 0.6	众达:红色	
	8		UL1571#28AWG7/0.127 OD: 0.6	众达:黑色	
2	36		TERMINAL	DF19-T	
1	2		HOUSING	DF19-2*20P	

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

煜倫股份有限公司

PART NO. DF19X2-2020M-F12N		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
DWG NO. DF19X2-2020M-F12N		DRAWING BY						
FILE NO.		PROJECTION 		AREA	REVISIONS	HK	DATE	