

SPECIFICATIONS:

Material





1. INSULATOR: LCP
2. TERMINAL: PHOSPHOR BRONZE
3. EAR: BRASS

Plating

1. TERMINAL: Tin Plating
2. EAR: Tin Plating

Electrical

1. Current rating: 0.5A Per contact
2. Voltage rating: 150V AC
3. Dielectric withstanding voltage: 250V AC
4. Insulation resistance: 500 Milli ohms min
5. Contact resistance: 50 milli ohms Max

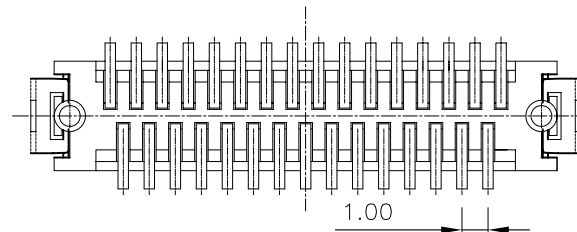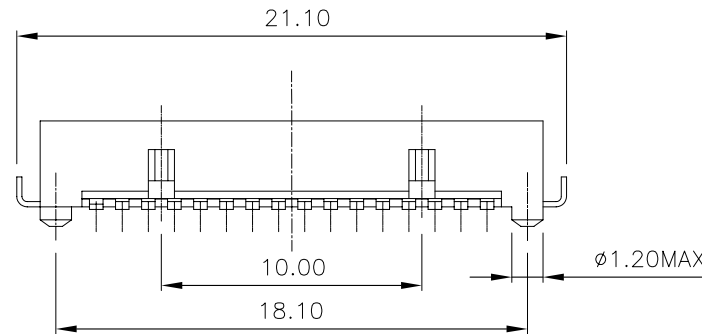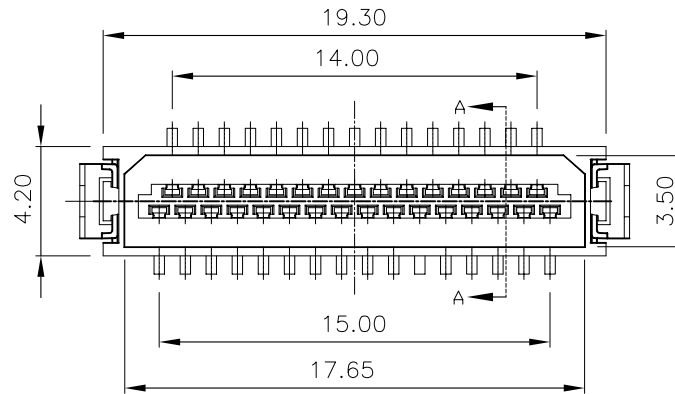

照片框

RoHS Compliant

TOLERANCES ARE

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

ORDER INFORMATION

DF9-P-31-LF
SERIES T LEADFREE
31 WAY
MALE

DESCRIPTION: DF9-31P 公 (CUSTOMER)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com