
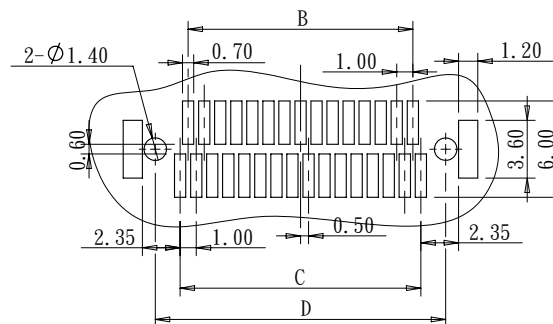


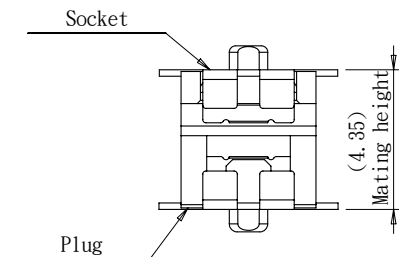

PCB Layout(REF.)  
Component Top View

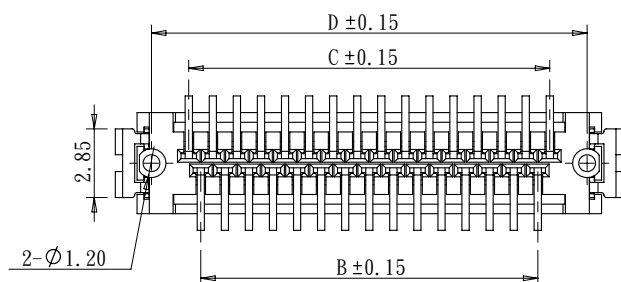


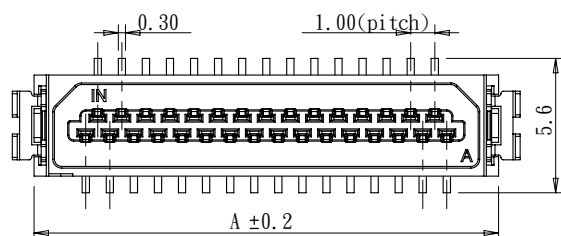
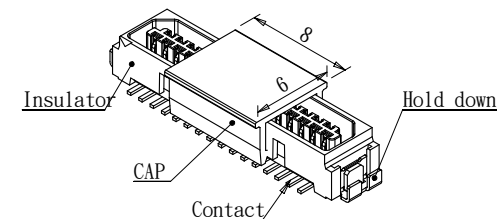


Table 1

| Pos | A    | B  | C  | D    | Note |
|-----|------|----|----|------|------|
| 9   | 8.3  | 3  | 4  | 7.1  |      |
| 11  | 9.3  | 4  | 5  | 8.1  |      |
| 13  | 10.3 | 5  | 6  | 9.1  |      |
| 15  | 11.3 | 6  | 7  | 10.1 |      |
| 17  | 12.3 | 7  | 8  | 11.1 |      |
| 19  | 13.3 | 8  | 9  | 12.1 |      |
| 21  | 14.3 | 9  | 10 | 13.1 |      |
| 23  | 15.3 | 10 | 11 | 14.1 |      |
| 25  | 16.3 | 11 | 12 | 15.1 |      |
| 27  | 17.3 | 12 | 13 | 16.1 |      |
| 29  | 18.3 | 13 | 14 | 17.1 |      |
| 31  | 19.3 | 14 | 15 | 18.1 |      |
| 41  | 24.3 | 19 | 20 | 23.1 |      |
| 51  | 29.3 | 24 | 25 | 28.1 |      |

| 4   | Cap         | 1        | H-Temp plastic |            |          |
|-----|-------------|----------|----------------|------------|----------|
| 3   | Hold down   | 2        | Copper Alloy   | Tin plated |          |
| 2   | Contact     | Table 1  | Copper Alloy   | Tin plated |          |
| 1   | Insulator   | 1        | LCP+GF         | Nature     | UL 94V-0 |
| No. | Description | Quantity | Material       | Finish     | Note     |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



PPOJECTION

照片框

ORDER INFORMATION

DF9-PACR-xx-LF  
SERIES  
LEADFREE  
09~51WAY  
REEL  
CAP  
POST+EAR  
MALE

DESCRIPTION:

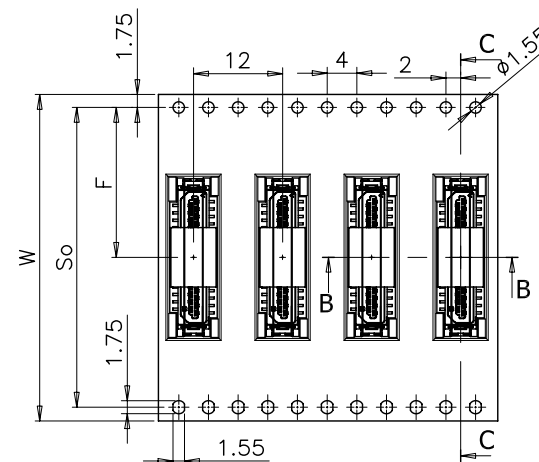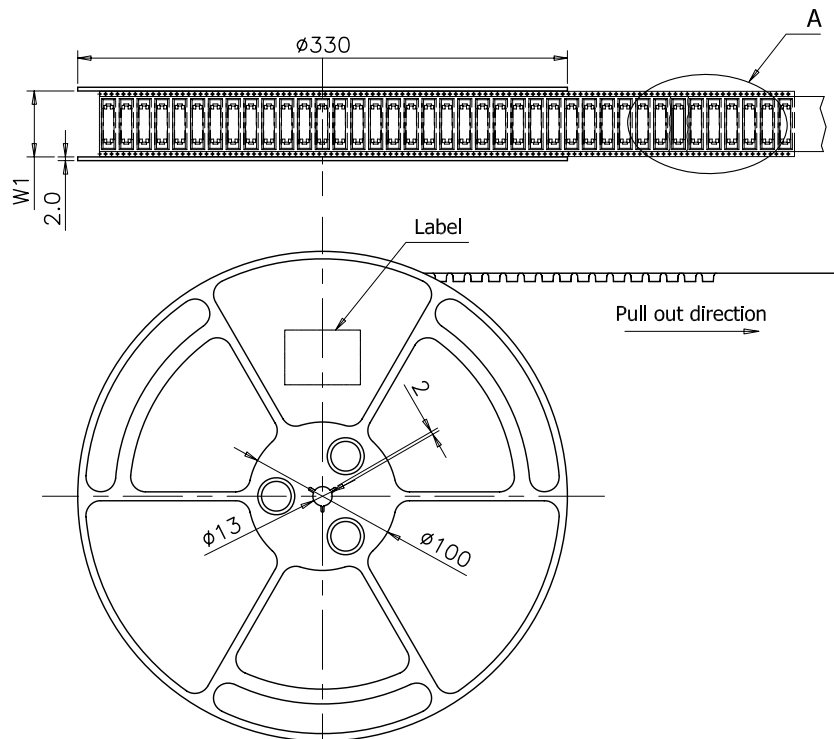


A view detail




C-C Section

Note :


1. Number of connectors : 1000pcs/reel

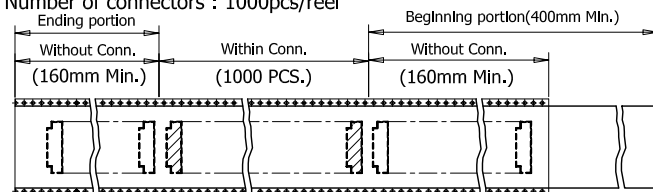

2. Peeling off force of cover tape :  
10~130gf.  
(Test direction as shown in following Fig.)

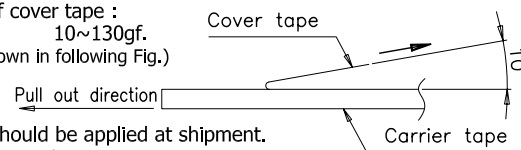

This requirement should be applied at shipment.  
(Peel off should not allowed,  
during transportation)



B-B Section

Table -- Carrier tape Dim.

| Pos.    | W  | So   | F    | W1   |
|---------|----|------|------|------|
| 9 ~ 21  | 24 | ---- | 7.5  | 24.4 |
| 23 ~ 29 | 32 | 28.4 | 14.2 | 32.4 |
| 31 ~ 51 | 44 | 40.4 | 20.2 | 44.4 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DF9-PACR-xx-LF  
SERIES  
LEADFREE  
09~51WAY  
REEL  
CAP  
POST+EAR  
MALE

DESCRIPTION: Board to Board Conn. 1.0mm pitch Straight SMT, Plug