
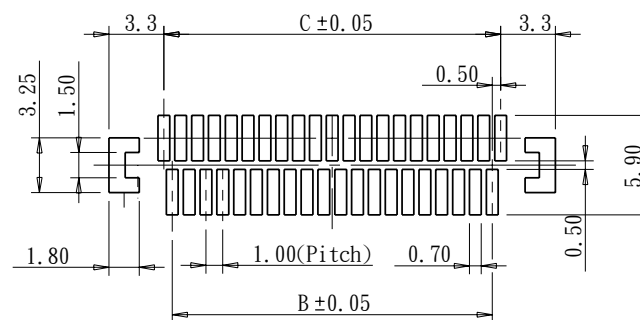
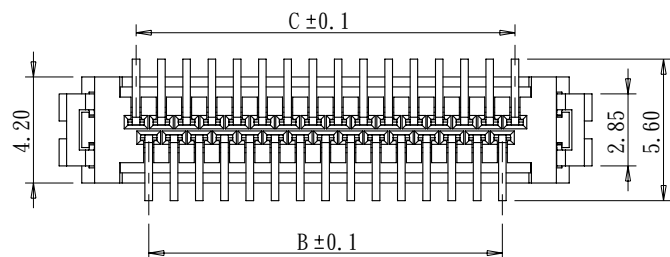
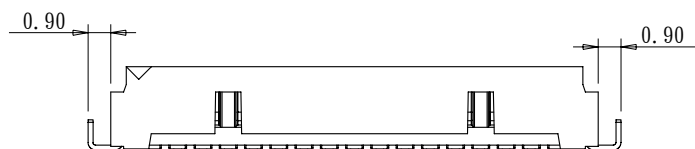
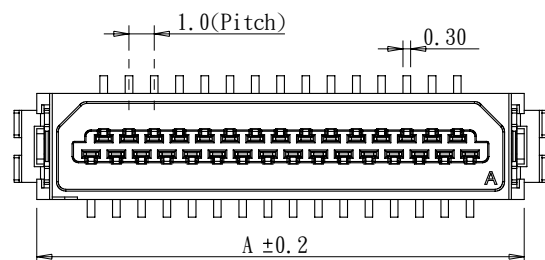




PCB Layout(REF.)
Component Top View





Table 1

Pos.	A	B	C	Note
17	12.3	7	8	
19	13.3	8	9	
21	14.3	9	10	
23	15.3	10	11	
25	16.3	11	12	
27	17.3	12	13	
29	18.3	13	14	
31	19.3	14	15	
33	20.3	15	16	
35	21.3	16	17	
37	22.3	17	18	
39	23.3	18	19	
41	24.3	19	20	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±


PPOJECTION

照片框

ORDER INFORMATION

DF9-PECR-xx-LF
SERIES T T T T LEADFREE
17~41 WAY
MALE CAP REEL
EAR

DESCRIPTION: Board to Board Conn., 1.0mm pitch, Straight SMT , Plug (Halogen Free)

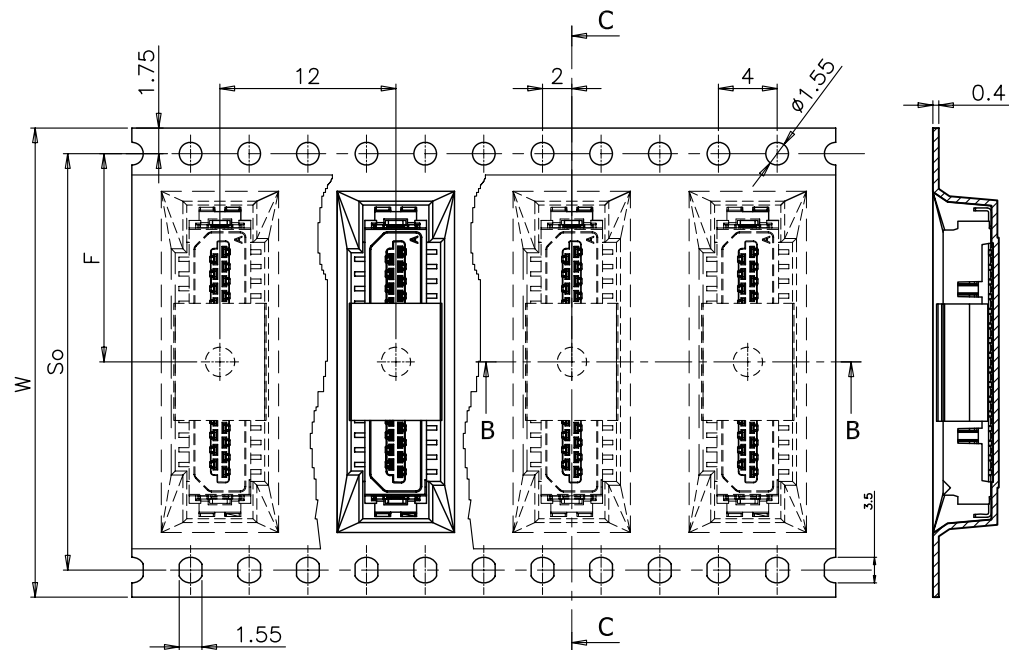

C-C Section

Number of connectors : 1000pcs/roll

Ending portion

Without Conn.
(160mm Min.)

Within Conn.
(1000 PCS.)

Beginning portion(400mm Min.)

Without Conn.
(160mm Min.)



The diagram illustrates the assembly of a carrier tape. A horizontal line represents the carrier tape, with a label 'Carrier tape' pointing to it. Above it, a line represents the cover tape, with a label 'Cover tape' pointing to it. A component, represented by a small rectangle with a circle inside, is shown being inserted into the carrier tape. An arrow points to the component, and another arrow points to the carrier tape. The text 'Equipment.' is partially visible on the left side of the diagram.

Pos.	W	So	F	W1
17 ~ 19	24	----	7.5	24.4
21 ~ 29	32	28.4	14.2	32.4
31 ~ 41	44	40.4	20.2	44.4

DESCRIPTION: Board to Board Conn. 1.0mm pitch Straight SMT, Plug (Halogen Free)