

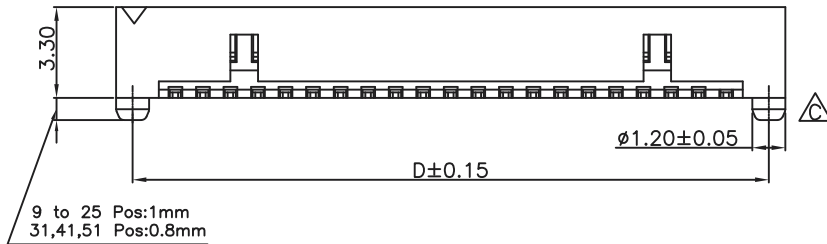



Mating Drawing (Ref.)

Specifications

Current rating : 0.5A AC/DC  
 Voltage rating : 150V AC/DC  
 Contact resistance : 50m ohm. max.  
 Insulation resistance : 500M ohm. min.at 100V DC  
 Withstanding Voltage : 250V AC for one minute  
 Operating Temperature range : -20°C to +105°C  
 Material and Plating  
 Housing :High Temp. Plastic  
 Color:Natural  
 Contact :Phosphor Bronze  
 Plating : Tin Plating



Pin No	A	B	C	D	Pin No	A	B	C	D
09	8.30	3.00	4.00	7.10	21	14.30	9.00	10.00	13.10
11	9.30	4.00	5.00	8.10	23	15.30	10.00	11.00	14.10
13	10.30	5.00	6.00	9.10	25	16.30	11.00	12.00	15.10
15	11.30	6.00	7.00	10.10	31	19.30	14.00	15.00	18.10
17	12.30	7.00	8.00	11.10	41	24.30	19.00	20.00	23.10
19	13.30	8.00	9.00	12.10	51	29.30	24.00	25.00	28.10

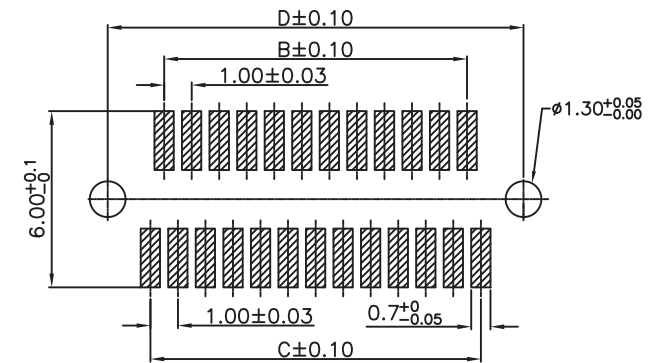

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
 .X ± 0.20  
 .XX ± 0.15  
 .XXX ±  
 ANG ±

PJECTION

照片框

ORDER INFORMATION

DF9-PP-xx-LF  
 SERIES | LEADFREE  
 09-51 WAY  
 POST  
 MALE

DESCRIPTION: 1.0mm Board to Board Plug