
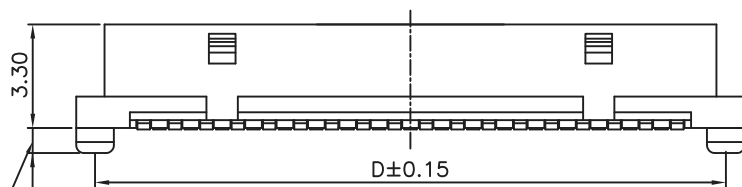
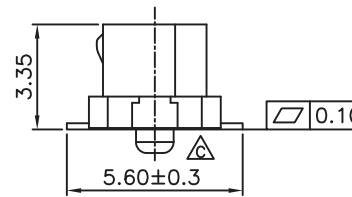


Mating Drawing (Ref.)


Specifications

- Current rating : 0.5A AC/DC
- Voltage rating : 150V AC/DC
- Contact resistance : 50m ohm. max.
- Insulation resistance : 500M ohm. min.at 100V DC
- Withstanding Voltage : 250V AC for one minute
- Operating Temperature range : -20°C to +105°C
- Material and Plating
- Housing :High Temp. Plastic
- Color:Natural
- Contact :Phosphor Bronze
- Plating : Tin Plating



9 to 25 Pos:1mm
31,41,51 Pos:0.8mm

Pin No	A	B	C	D	Pin No	A	B	C	D
09	8.30	3.00	4.00	7.10	21	14.30	9.00	10.00	13.10
11	9.30	4.00	5.00	8.10	23	15.30	10.00	11.00	14.10
13	10.30	5.00	6.00	9.10	25	16.30	11.00	12.00	15.10
15	11.30	6.00	7.00	10.10	31	19.30	14.00	15.00	18.10
17	12.30	7.00	8.00	11.10	41	24.30	19.00	20.00	23.10
19	13.30	8.00	9.00	12.10	51	29.30	24.00	25.00	28.10

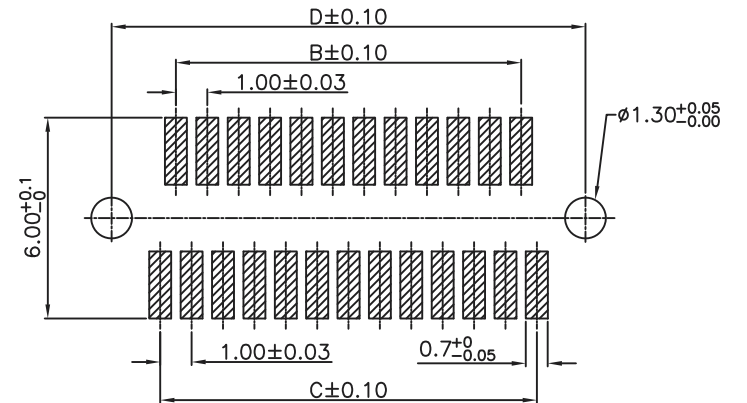

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DF9-SP1-xx-LF
SERIES | LEADFREE
09-51 WAY
POST
FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 1.0mm Board to Board Receptacle