


BEFORE BENDING

NOTE:

1. Pitch 0.5mm*41Pin
2. FFC Rating Temperature:80 C
3. FFC Rating Voltage:30V
4. FFC Width: 21.0±0.08mm
5. HRS Connertor: DF9-41S-1V * 2pcs
6. Inner Conductor Resistance: 5 Ω
7. Insulation Resistance: 1M Ω

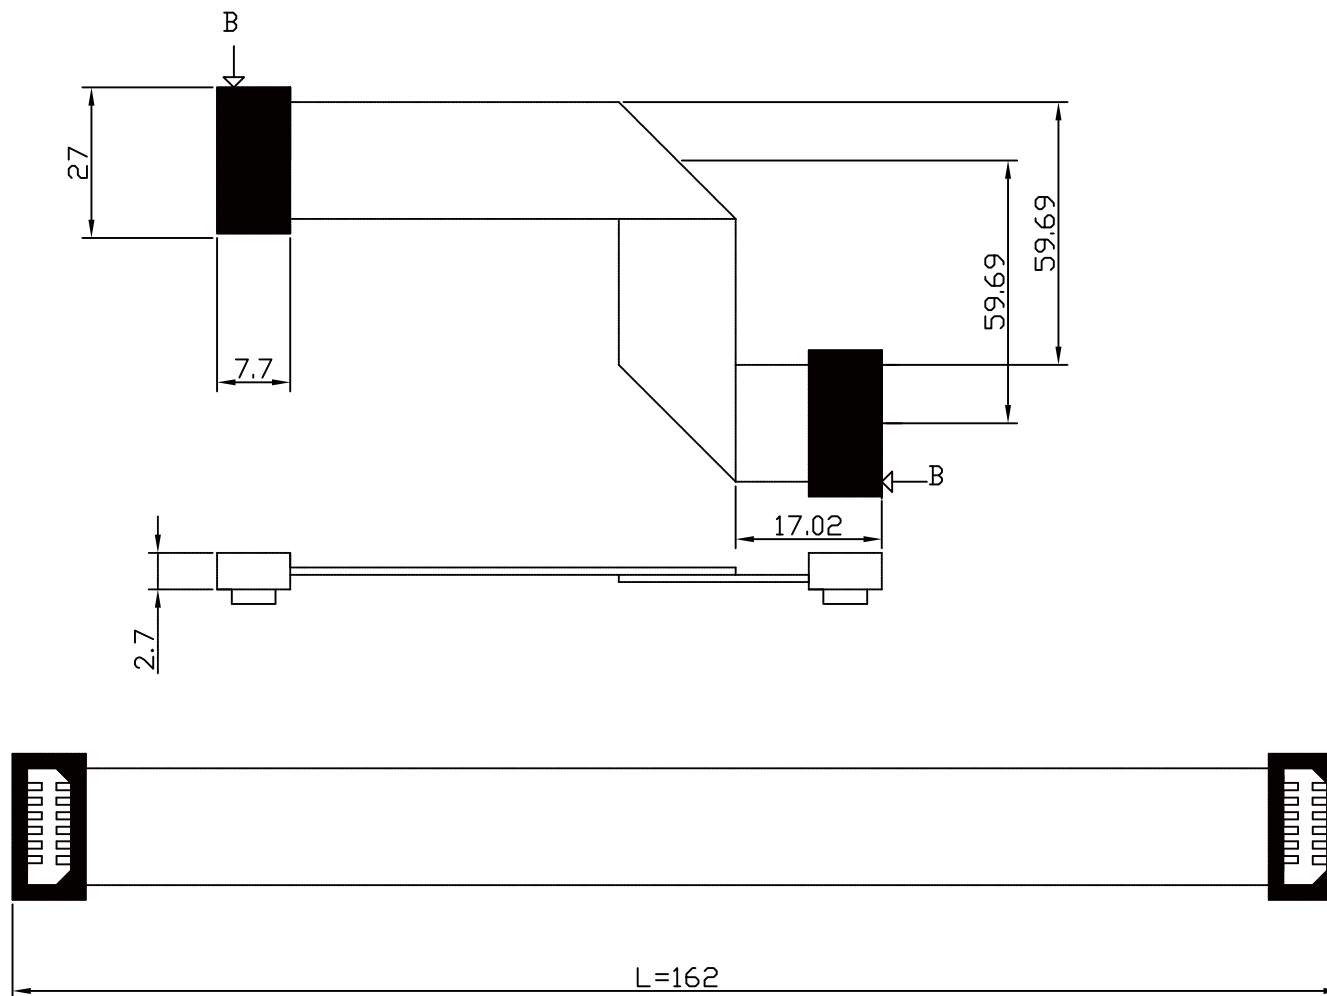

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DF9X2-4141L-F16C2-LF

SERIES

LEADFREE

162mm

FEMALE TO FEMALE

L TYPE

41 TO 41 WAY

DESCRIPTION: