

Cover

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0

Contact : Copper alloy

Electrical


Contact Resistance : 20 milliohms  
Max at 1 AMP DC.

Insulation Resistance : 1000  
megohms at 500 VDC



Dielectric Withstanding Voltage :  
1000 VAC/rms 60Hz for 1 minute

Current Rating : 3 AMP

Volatge Rating : 250 VAC/rms 60Hz

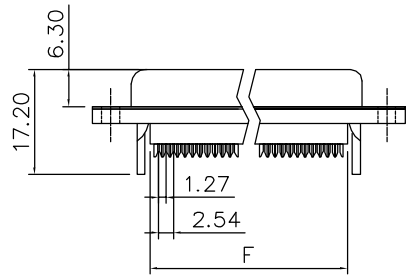

With Insulator Support



Strain Relief

Dimensions

Positions	A	B	C	E	F
9	30.50	25.00	16.00	11.08	13.10
15	39.00	33.32	24.27	19.39	20.70
25	53.08	47.04	38.22	33.24	33.68
37	69.40	63.50	54.65	49.86	50.30

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.38

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.13

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

DFM-S-xx-LF  
SERIES | LEADFREE  
09~37WAY  
FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: