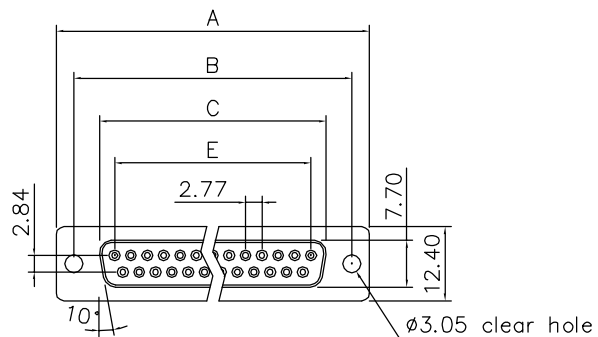


Cover

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0

Contact : Copper alloy

Electrical


Contact Resistance : 20 milliohms
Max at 1 AMP DC.

Insulation Resistance : 1000
megohms at 500 VDC


Dielectric Withstanding Voltage :
1000 VAC/rms 60Hz for 1 minute

Current Rating : 3 AMP

Voltage Rating : 250 VAC/rms 60Hz

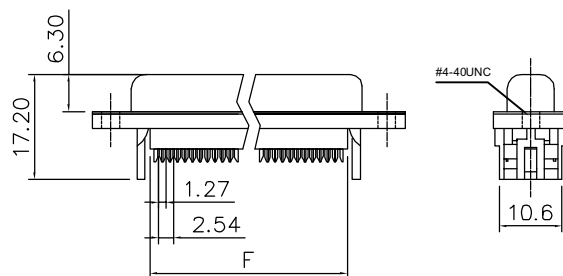

With Insulator Support

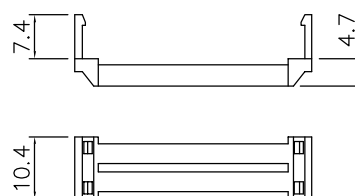

Strain Relief

Dimensions

Positions	A	B	C	E	F
9	30.50	25.00	16.00	11.08	13.10
15	39.00	33.32	24.27	19.39	20.70
25	53.08	47.04	38.22	33.24	33.68
37	69.40	63.50	54.65	49.86	50.30

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.38

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XXX $\pm$

DATE

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

DFM-SN-xx-LF
SERIES | | LEADFREE
09-37WAY
NUT
FEMALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com