
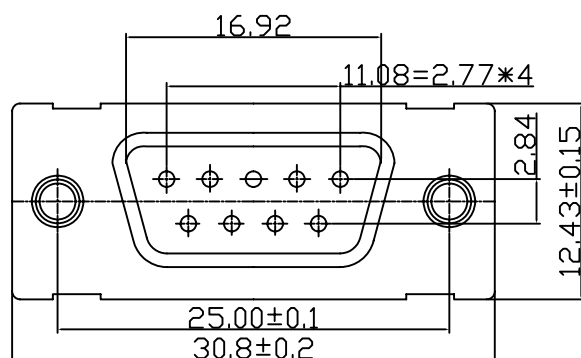
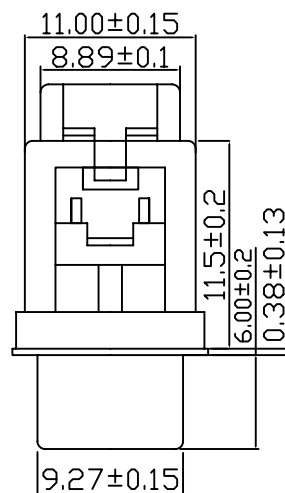


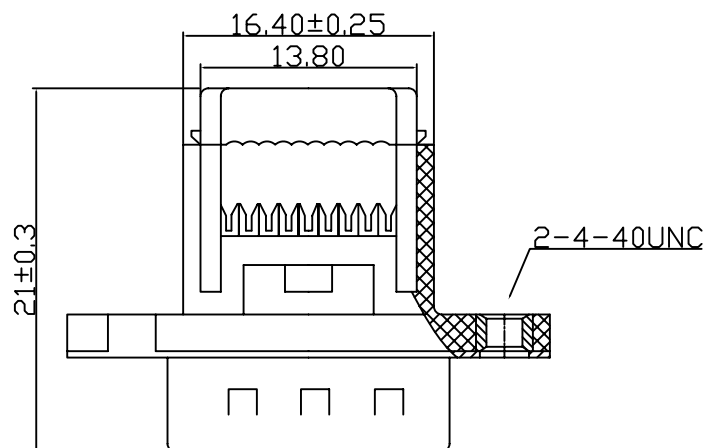

#### SPECIFICATION:

CURRENT RATING:3 AMP

INSULATOR RESISTANCE:1000 MΩ MIN.(AT 500V DC)

DIELECTRIC WITHSTANDING VOLTAGE:AC 500V MIN.(FOR 1 MINUTE)

CONTACT RESISTANCE: 15 mΩ MAX.

WIRE SIZE: AWG26 & 28STABDED. 1.27mm

INSULATOR MATERIALS: PBT+30%GLASS FIBER(UL 94V-0)

CONTACT MATERIAL:BRASS

FINISH:GOLD OVER NICKEL:

OPERATING TEMPRATUR:-55°~105°C.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

#### ORDER INFORMATION

DFML-PNBK-09-LF

SERIES T LEADFREE  
T 09 WAY  
T BLACK  
NUT  
MALE

DESCRIPTION: D-SUB IDC 9公 鉤4#40 UNC