



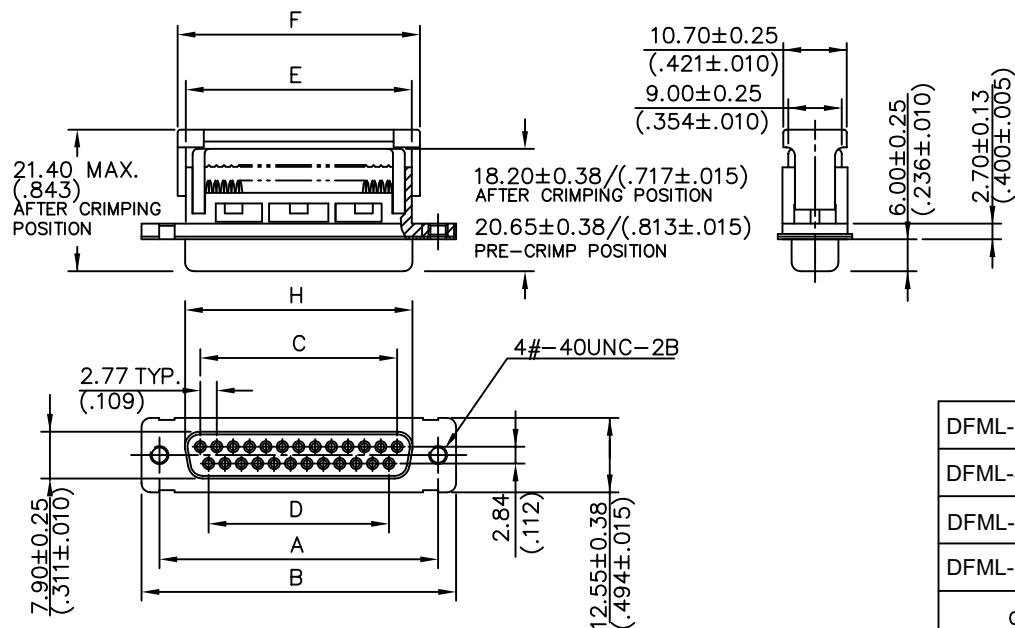

SPECIFICATION :

- .CURRENT RATING : 1 AMP.
- .INSULATION RESISTANCE : $\geq 1000 \text{ M}\Omega \text{ MIN. (AT 500 V DC)}$
- .DIELECTRIC WITHSTANDING VOLTAGE : AC 500 V MIN. (FOR 1 MINUTE)
- .OPERATING TEMPERATURE : $-55^{\circ}\text{C TO } 105^{\circ}\text{C}$
- .CONTACT RESISTANCE : $\leq 15\text{m}\Omega$
- .DIELECTRIC MATERIAL : PBT WITH GLASS-FIBER REINFORCED UL 94V-0
- .COLOR : BLACK , BLUE , GRAY (OPTIONAL)
- .CONTACT MATERIAL : PHOSPHOR BRONZE
- .CONTACT PLATING : GOLD OVER NICKEL
- .WIRE SIZE : AWG 26 & 28 STRANDED , 1.27mm CONDUCTOR CENTRE FLAT CABLE

DFML-SN-37	37	63.50(2.500)	69.40(2.732)	49.86/(1.963)	47.09/(1.854)	54.60/(2.150)	57.10/(2.248)
DFML-SN-25	25	47.04(1.852)	53.09(2.090)	33.24/(1.309)	30.47/(1.200)	38.14/(1.502)	40.90/(1.610)
DFML-SN-15	15	33.32(1.312)	39.10(1.539)	19.39/(.763)	16.62/(.654)	24.00/(.945)	26.60/(1.047)
DFML-SN-09	9	24.99/(.984)	30.80(1.212)	11.08/(.436)	8.31/(.327)	16.10/(.634)	18.60/(.732)
CATALOG NO.	NO. OF POSITIONS	A ± 0.13 (± 0.005)	B ± 0.25 (± 0.010)	C ± 0.13 (± 0.005)	D ± 0.13 (± 0.005)	E ± 0.25 (± 0.010)	F ± 0.25 (± 0.010)

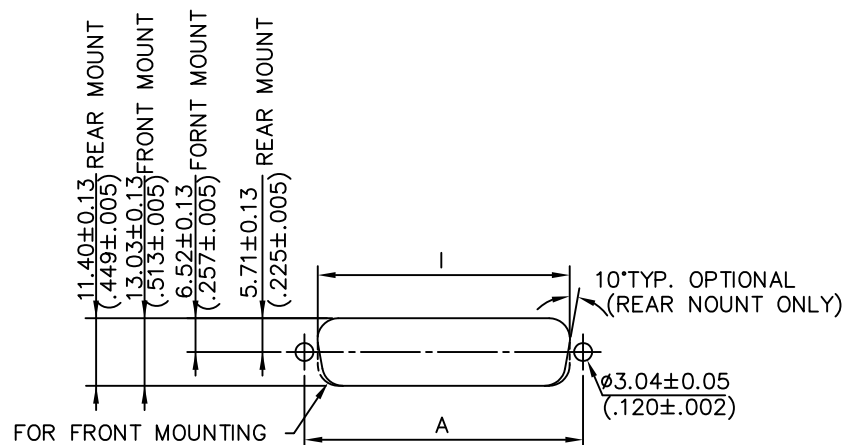

RECOMMENDED PANEL CUTOUT DIMENSIONS

54.84/(2.159)	59.08/(2.326)	60.73/(2.391)
38.38/(1.511)	42.52/(1.674)	44.27/(1.743)
24.66/(.971)	28.80/(1.134)	30.53/(1.202)
16.33/(.643)	20.47/(.806)	22.20/(.874)
H ± 0.25 (± 0.010)	I ± 0.13 / (.005) REAR MOUNTING	I ± 0.13 / (.005) FRONT MOUNTING

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DFML-SN-xx-LF

SERIES | T LEADFREE
| 09~37 WAY
| NUT
| FEMALE

DESCRIPTION: IDC D-SUB FEMALE CONNECTOR WITH METAL SHELL