

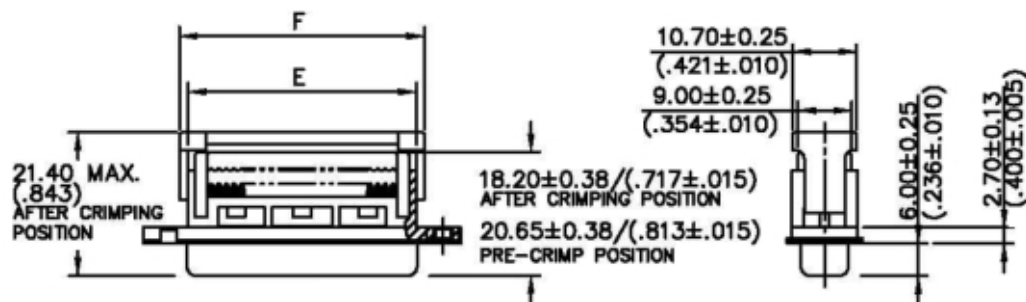


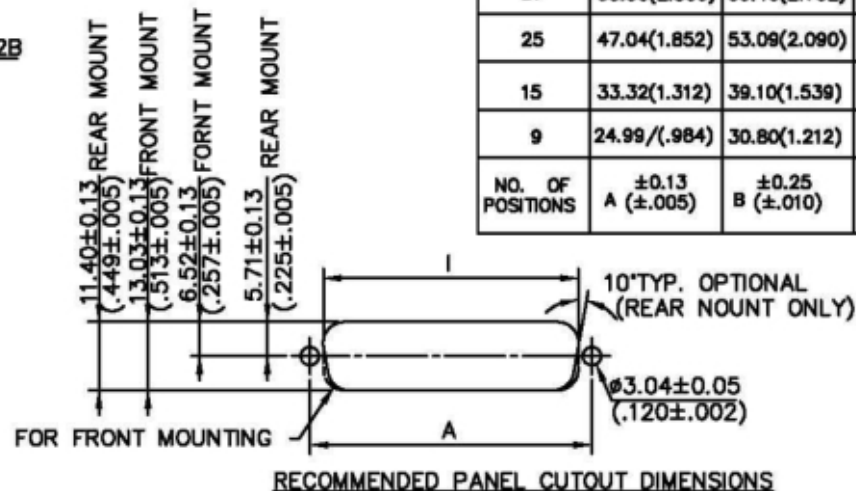

SPECIFICATION :

.CURRENT RATING : 1 AMP.
 .INSULATION RESISTANCE : >1000 MΩ MIN. (AT 500 V DC)
 .DIELECTRIC WITHSTANDING VOLTAGE : AC 500 V MIN. (FOR 1 MINUTE)
 .OPERATING TEMPERATURE : -55°C TO 105°C
 .CONTACT RESISTANCE : ≤ 15mΩ
 .DIELECTRIC MATERIAL : PBT WITH GLASS-FIBER REINFORCED UL 94V-0
 .COLOR : BLACK , BLUE , GRAY (OPTIONAL)
 .CONTACT MATERIAL : PHOSPHOR BRONZE
 .CONTACT PLATING : GOLD OVER NICKEL
 .WIRE SIZE : AWG 26 & 28 STRANDED , 1.27mm CONDUCTOR CENTRE FLAT CABLE

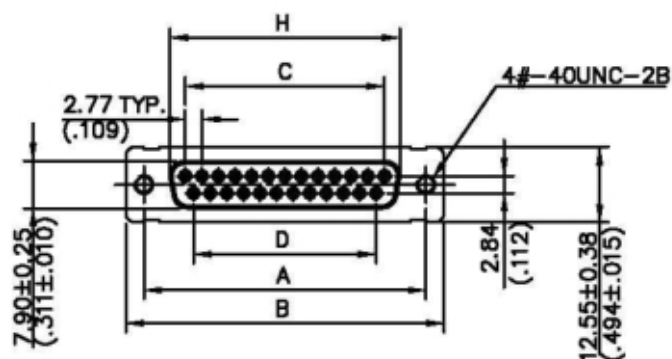

37	63.50(2.500)	69.40(2.732)	49.86/(1.963)	47.09/(1.854)	54.60/(2.150)	57.10/(2.248)
25	47.04(1.852)	53.09(2.090)	33.24/(1.309)	30.47/(1.200)	38.14/(1.502)	40.90/(1.610)
15	33.32(1.312)	39.10(1.539)	19.39/(.763)	16.62/(.654)	24.00/(.945)	26.60/(1.047)
9	24.99/(.984)	30.80(1.212)	11.08/(.436)	8.31/(.327)	16.10/(.634)	18.60/(.732)
NO. OF POSITIONS	A ±0.13 (±.005)	B ±0.25 (±.010)	C ±0.13 (±.005)	D ±0.13 (±.005)	E ±0.25 (±.010)	F ±0.25 (±.010)

54.84/(2.159)	59.08/(2.326)	60.73/(2.391)
38.38/(1.511)	42.52/(1.674)	44.27/(1.743)
24.66/(.971)	28.80/(1.134)	30.53/(1.202)
16.33/(.643)	20.47/(.806)	22.20/(.874)
H ±0.25 (±.010)	±0.13/(.005) REAR MOUNTING	±0.13/(.005) FRONT MOUNTING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

DFML-SS30N-xx-LF

SERIES

LEADFREE
 09-37 WAY
 NUT
 SEMI GOLD 30u"
 FEMALE

DESCRIPTION: