

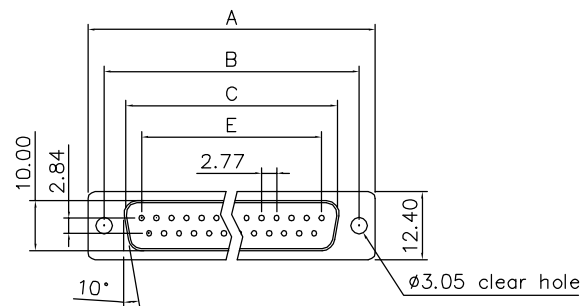
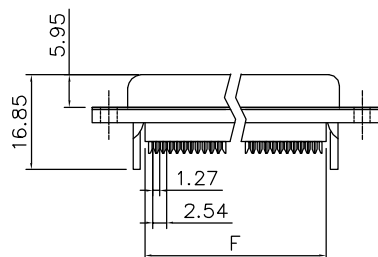


Cover



With Insulator Support



Strain Relief

## Product Specification

### Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0

Contact : Copper alloy

### Electrical

Contact Resistance : 20 milliohms  
Max at 1 AMP DC.

Insulation Resistance : 1000  
megohms at 500 VDC

Dielectric Withstanding Voltage :  
1000 VAC/rms 60Hz for 1 minute

Current Rating : 3 AMP

Volatge Rating : 250 VAC/rms 60Hz

### Dimensions

| Positions | A     | B     | C     | E     | F     |
|-----------|-------|-------|-------|-------|-------|
| 9         | 30.50 | 25.00 | 18.05 | 11.08 | 13.10 |
| 15        | 39.00 | 33.32 | 26.35 | 19.39 | 20.70 |
| 25        | 53.08 | 47.04 | 40.95 | 33.24 | 33.68 |
| 37        | 69.25 | 63.50 | 55.60 | 49.86 | 50.30 |

### RoHS Compliant

### TOLERANCES ARE

DRAWING BY CY

X.  $\pm 0.38$

CHECKED BY GENIUS

.X.  $\pm 0.25$

UNIT / mm

SCALE 1 : 1

.XX.  $\pm 0.13$

DATE

.XXX  $\pm$

ANG  $\pm$

SIZE A4

PPOJECTION

照片框

### ORDER INFORMATION

DFP-P-xx-LF  
SERIES | T LEADFREE  
09-37WAY  
MALE

DESCRIPTION:

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com