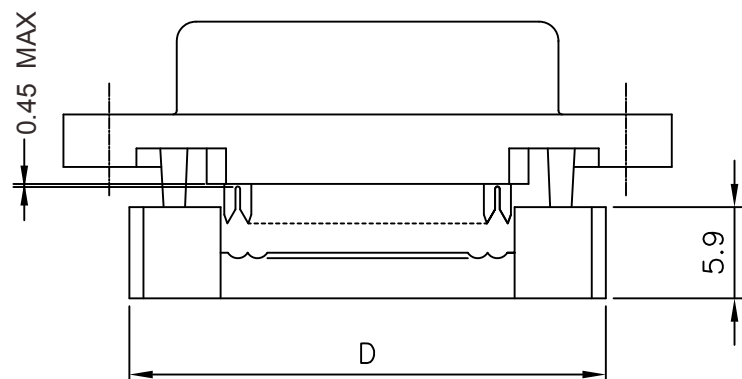
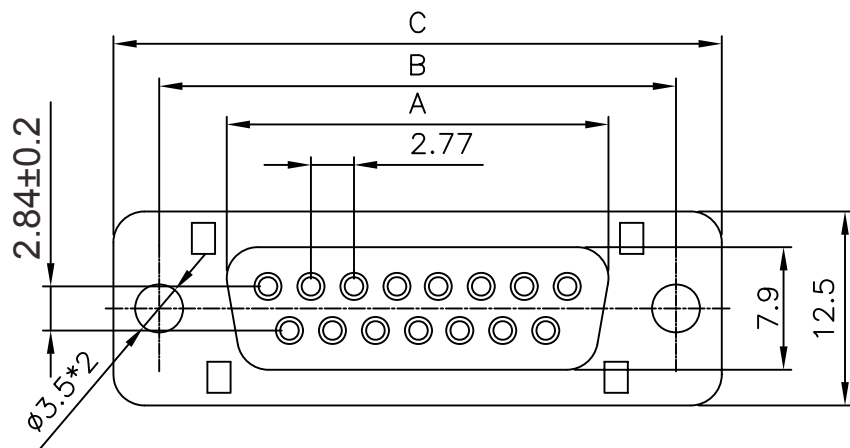


SPECIFICATION

MATERIAL

Insulator: Thermail Plastic UL94V-0

Contacts: Copper Alloy

CONTACT PLATING

Underplate: 50u"~100u" Nickel

Contact Area: 1u"~30u" Selective Gold

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating: 3 Amps Max.

Contact Resistance: 15 mohms Max.

Insulation Resistance: 3000 Mohms Min @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / Minute

Temperature Range: -55°C To +105°C

POSITION	A	B	C	D
DFP-SSxx-09	16.30	25.00	30.8	22.4
DFP-SSxx-15	24.60	33.30	39.2	30.8
DFP-SSxx-25	38.30	47.10	53.1	44.5
DFP-SSxx-37	54.80	63.50	69.4	61.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

DFP-SSxx-xx-LF

SERIES

LEADFREE

09~37 WAY

S05:SEMI GOLD 5u"

S30:SEMI GOLD 30u"

FEMALE

DESCRIPTION: D-SUB IDC FOR PLASTIC FEMALE