


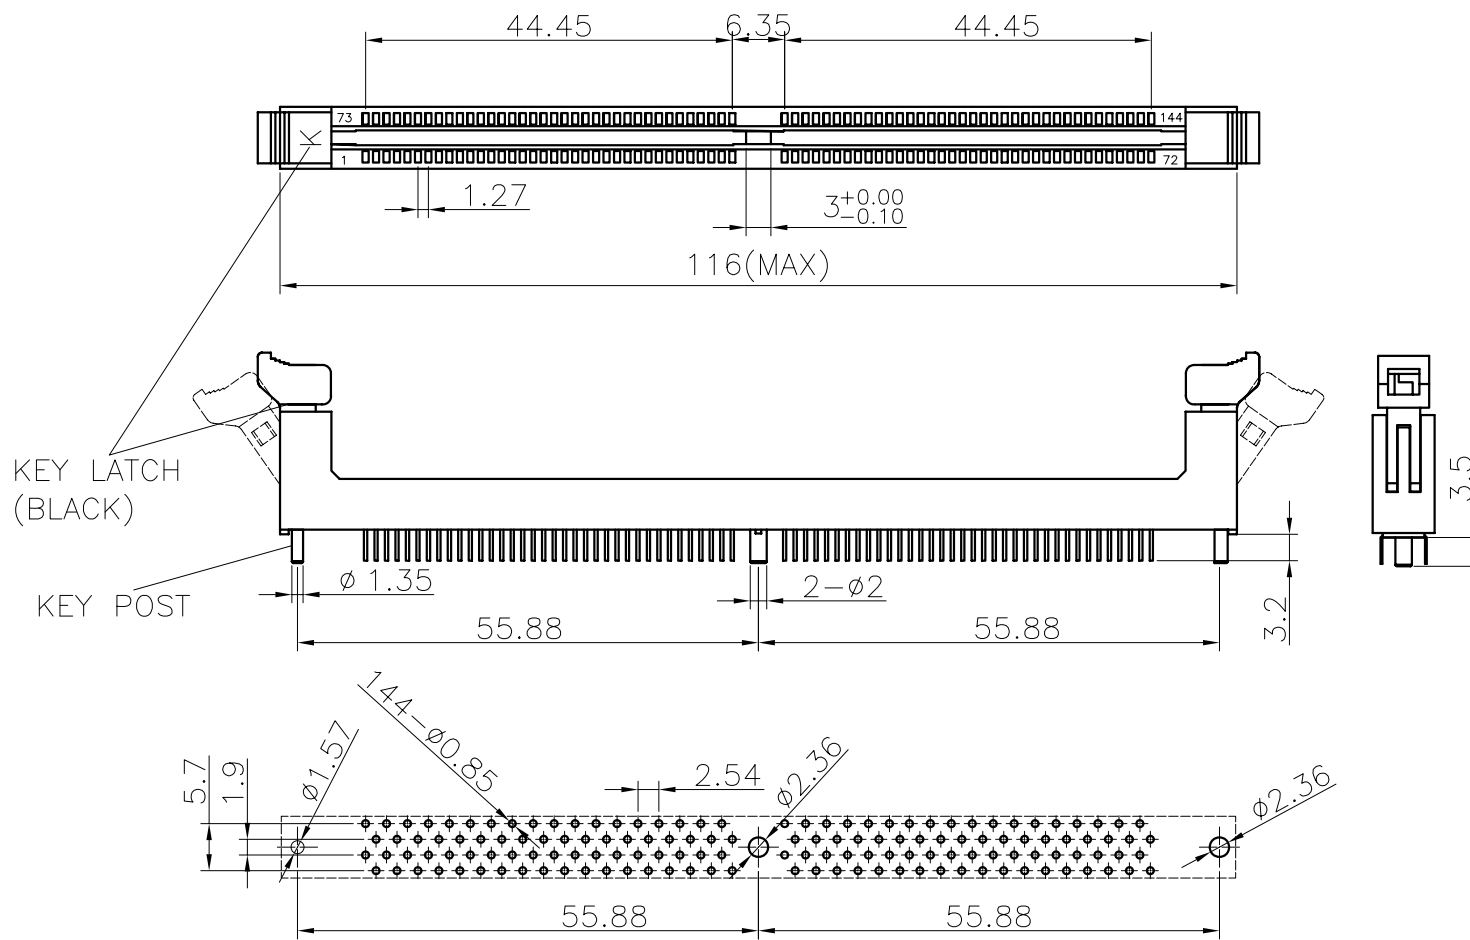

TOP VIEW
PCB LAYOUT RECOMMENDED

DIMM 144P Socket,
Pitch 1.27mm,Vertical,
Plastic Post

Physical:

Housing: NY, UL 94V-0

Contact: Copper Alloy

Specifications:

Voltage Current Rating: 1A. 250V AC

Insulation Resistance: 1000M ohm min

Contact Resistance: 30m ohm max

Dielectric Withstanding Voltage:

AC 500V For 1 Minute

Temperature Rating: -25°C To +105°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X $\pm$ 0.25

.XX $\pm$ 0.15

.XXX $\pm$

ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

DIM-DP-144-LF
SERIES | LEADFREE
144WAY
POST
DIP 180°

DESCRIPTION: