




VOLT	VOLT NO.	A
1.8V	V18	3.175
2.5V	V25	2.175
3.3V	V33	4.175

DDR Socket, Vertical
Three Metal Posts, 2.67mm
Physical:

Housing: High Temperature Thermoplastic
Contact: Copper Alloy

Specifications:

- Voltage Current Rating:** 1A, 250V AC
- Insulation Resistance:** 1000M ohm min
- Contact Resistance:** 30m ohm max
- Dielectric Withstanding Voltage:**
AC 500V For 1 Minute
- Temperature Rating:** -55°C To +105°C
- Wave soldering process (Pb free)**
peak temp. :260±5°C
- Conveyor speed requirement:**
80cm/min (Minimum)

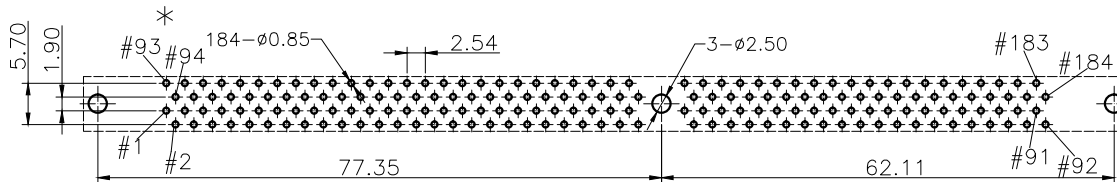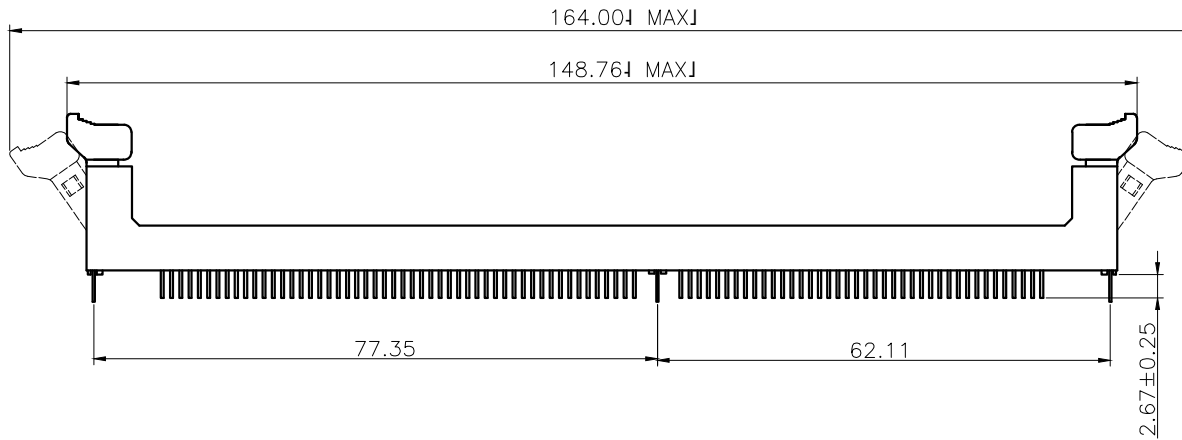

TOP VIEW
 PCB LAYOUT RECOMMENDED

RoHS Compliant

TOLERANCES ARE


MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PJECTION

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ±
 ANG ± 3°

照片框

ORDER INFORMATION

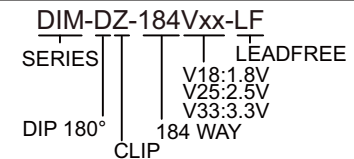

DESCRIPTION: DDR SOCKET