


DIM-L11PZ-184-LF
LEADFREE
RoHS Compliant

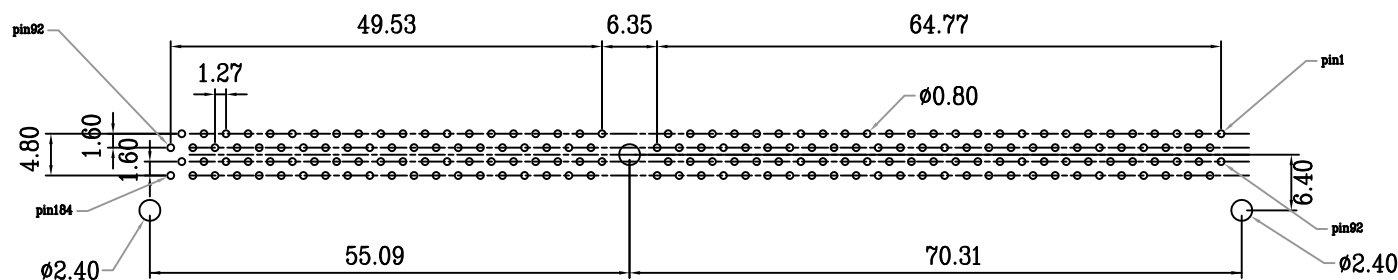

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. DIM-L11PZ-184

DWG NO. DIM-L11PZ-184

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

DDR Socket 184p Right Angle Reverse type

AREA

REVISIONS

HK



DATE

MATERIALS

- * Body : Liquid Crystal Polstal (L.C.P.) UL (94V-0)
- * Contact : Copper alloy
- * Contact plated : gold over niket (40-60u")or tin plating
- * Latch : Nylon 66 UL (94 V-0)

SPECIFICATION

- * Contact curret rating : 1 AMP
- * Conact resistance : 30 Milli OHMS Max.
- * Insulation resistance : 10,000 megoohms Min. iniitial
- * Operating temperature : -55°C to +105°C
- * Dielectric Withstanding Voltage : 1.0KVAC
- * Capacitance : 1pf Max.
- * Durability : 25 cycle Min.
- * Conact engaging force : 65 g Max. per conact,initial
- * Contact separating force : 16 g Min. per contact,initial

	PART NO. DIM-L11PZ-184		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: DDR Socket 184p Right Angle type			
	DWG NO. DIM-L11PZ-184							
焜倫股份有限公司	FILE NO.		PROJECTION 	AREA	REVISIONS	HK	DATE	
	UNIT / mm	SCALE 1:1						