


P.C.B.Layout

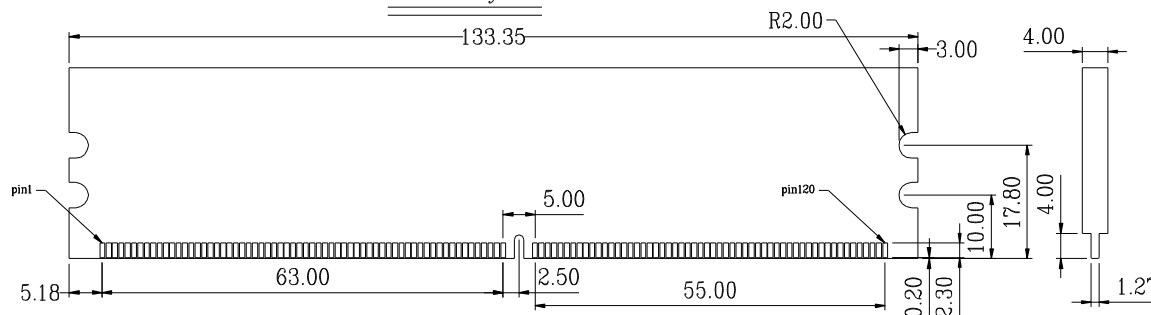

Recommended Module Layout

MATERIALS

- * Body : Liquid Crystal Polstal (L.C.P.) UL (94V-0)
- * Contact : Copper alloy
- * Contact plated : gold over nicket (40-60u") or tin plating
- * Latch : Nylon 66 UL (94 V-0)

SPECIFICATION

- * Contact curret rating : 1 AMP
- * Conact resistance : 30 Milli OHMS Max.
- * Insulation resistance : 5000 megoohms Min. initial
- * Operating temperature : -55°C to +105°C
- * Dielectric Withstanding Voltage : 1.0KVAC
- * Capacitance : 1pf Max.
- * Durability : 25 cycle Min.
- * Conact engaging force : 110 g Max. per conact,initial
- * Contact separating force : 40 g Min. per contact,initial

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

TOLERANCES ARE

X. ± 0.50
.X ± 0.35
.XX ± 0.25
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

DIM1-AZ-240V18R-LF
SERIES | | | LEADFREE REVERSED
CLIP
240 WAY 1.8V
SLANT DIP

DESCRIPTION: DDR2 socket 240p lowprofile 25° Reverse