

MATERIAL


INSULATOR: GLASS-REINFORCED THERMOPLASTIC.
 CONTACT: COPPER ALLOY.
 PLATING: MATING AREA - 10u GOLD OVER NICKEL.
 SOLDER AREA - TIN OVER NICKEL.

ELECTRICAL

VOLTAGE RATING: 250 VAC RMS.
 CURRENT RATING: 1 AMP.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC RMS 60Hz
 FOR 1 MINUTE.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN AT 500 VDC.
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.

ENVIRONMENTAL

TEMPERATURE RANGE: -55°C TO +85°C.

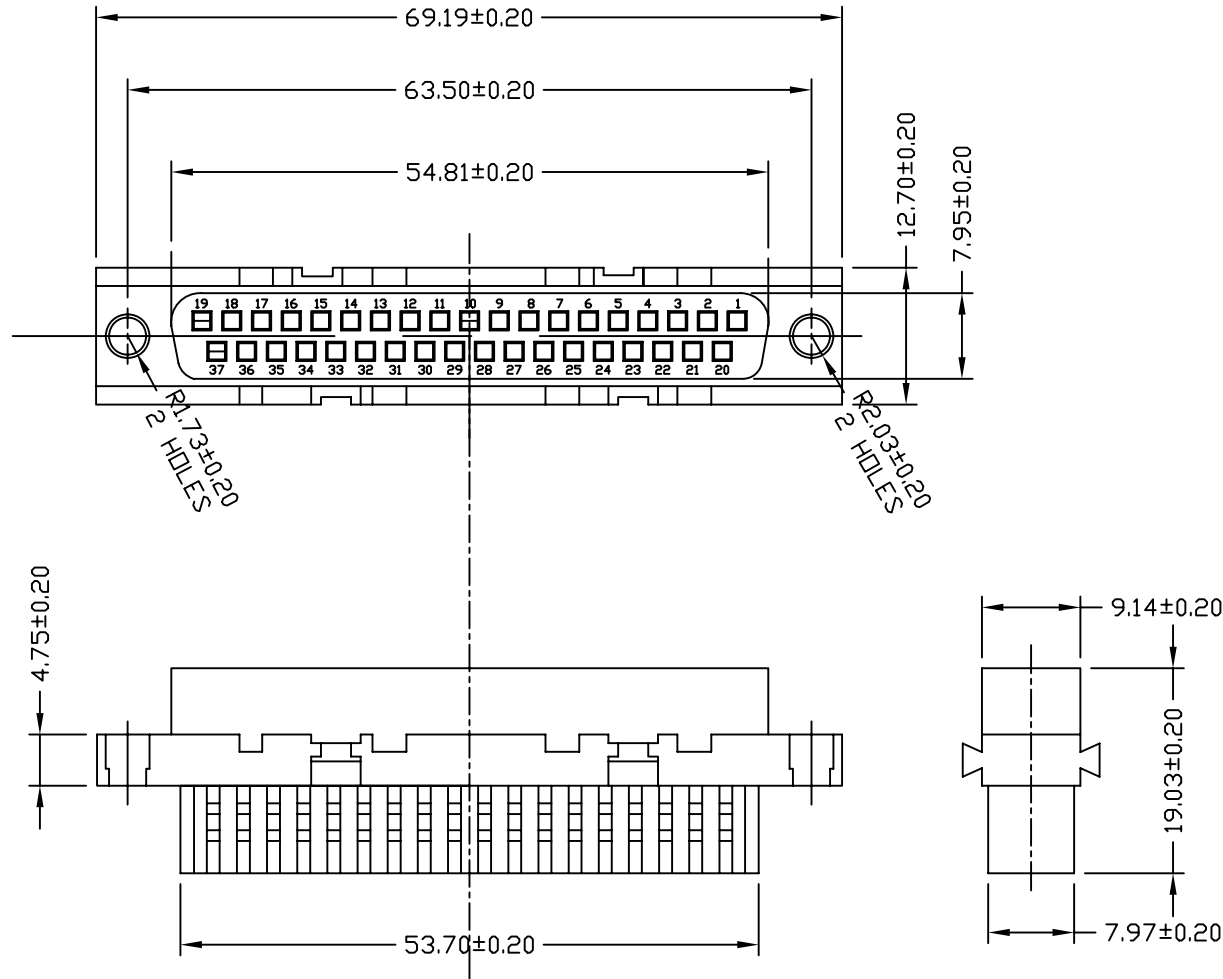

DIP-S-37-LF
 LEADFREE

RoHS Compliant



PART NO. DIP-S-37

DWG NO. DIP-S-37

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE
 .X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIP TION:				
AREA	REVISIONS	HK	DATE	

UNIT / mm SCALE 1:1

PROJECTION

煜倫股份有限公司