


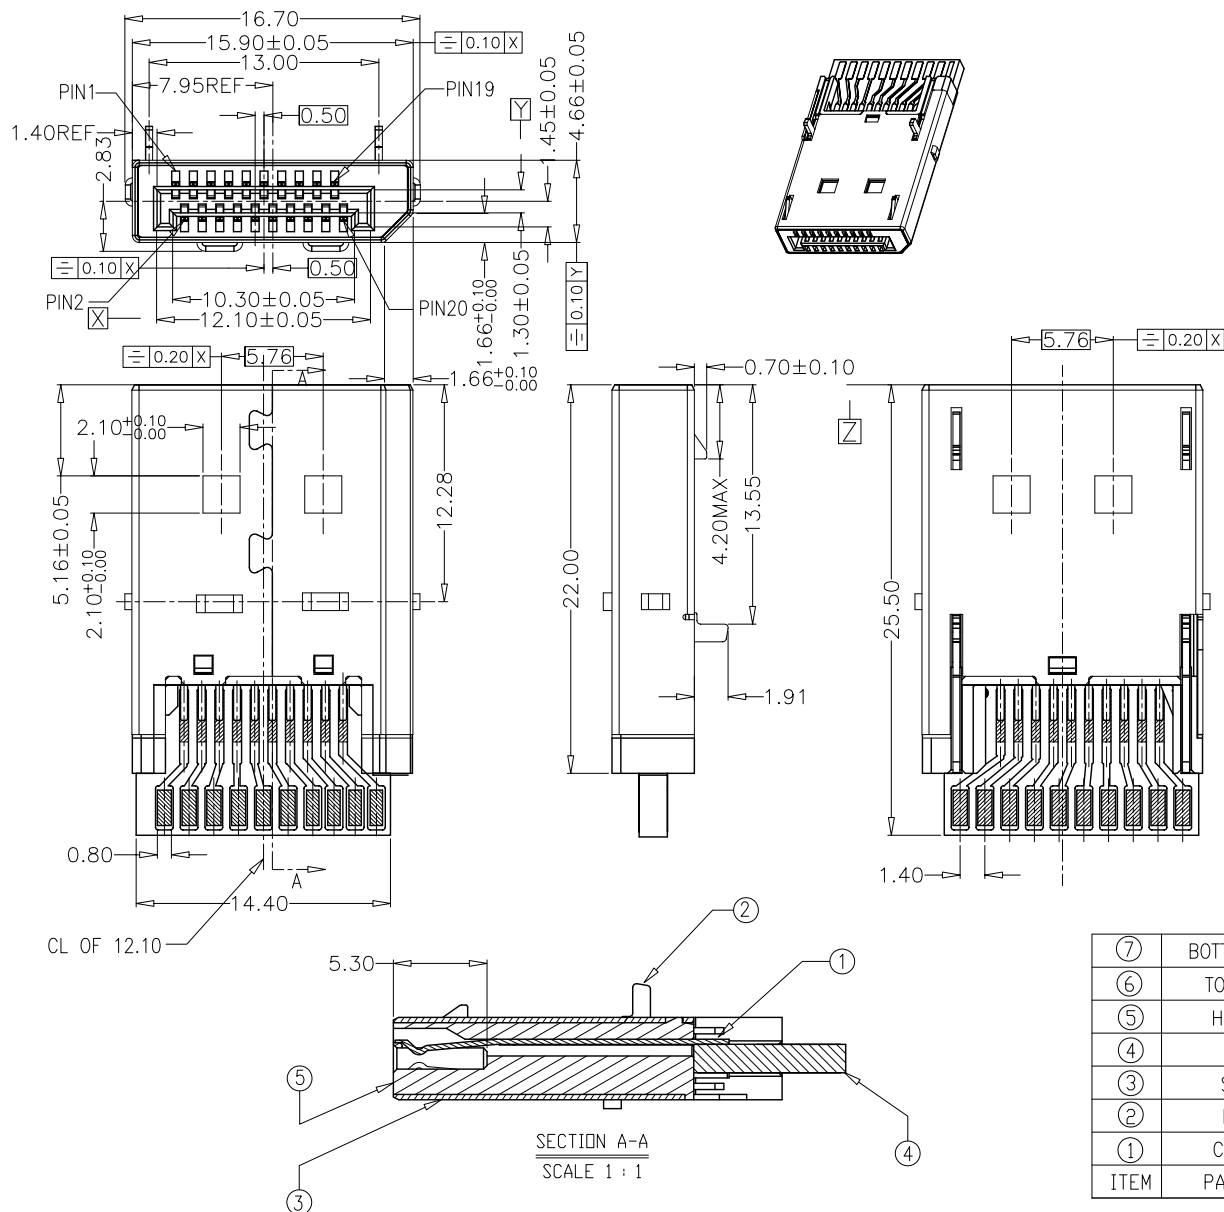

⑦	BOTTOM HOOD	1	THERMOPLASTIC	UL94V-0
⑥	TOP HOOD	1	THERMOPLASTIC	
⑤	HOUSING	1	THERMOPLASTIC	
④	PCB	1	FR-4	
③	SHELL	1	COPPER ALLOY	CU ALL OVER, PLATED OVER NICKEL
②	LATCH	2	STAINLESS STEEL	
①	CONTACT	20	COPPER ALLOY	NICKEL ALL OVER, CONTACT AREA PLATED OVER GOLD, SOLDER AREA PLATED OVER TIN
ITEM	PART NAME	Q'TY/EA	MATERIALS	NOTE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.20
.XXX ±
ANG ± 2°

PPOJECTION

照片框


ORDER INFORMATION

DISP-PA-20-LF
SERIES T LEADFREE
20WAY
ASSEMBLY
MALE


DESCRIPTION: DISPLAYPORT 20PIN PLUG ASSEMBLY TYPE

APPLICATION GUIDE :


1. CABLE TREATMENT:

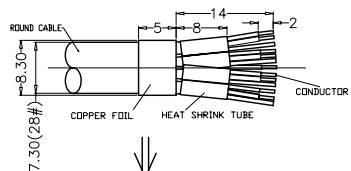


2. SOLDER AND INNER MOLDING

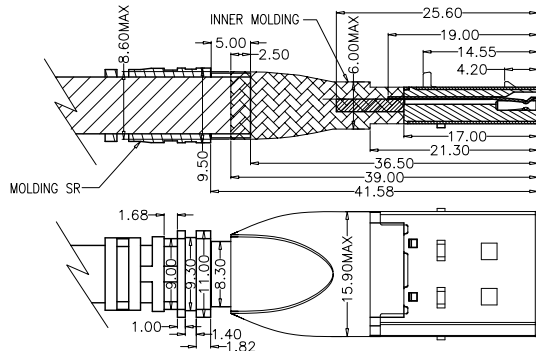

3. SOLDER COPPER

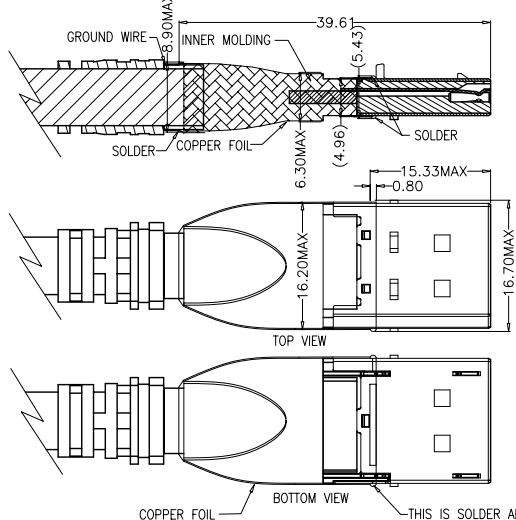

4. ASSEMBLE HOOD

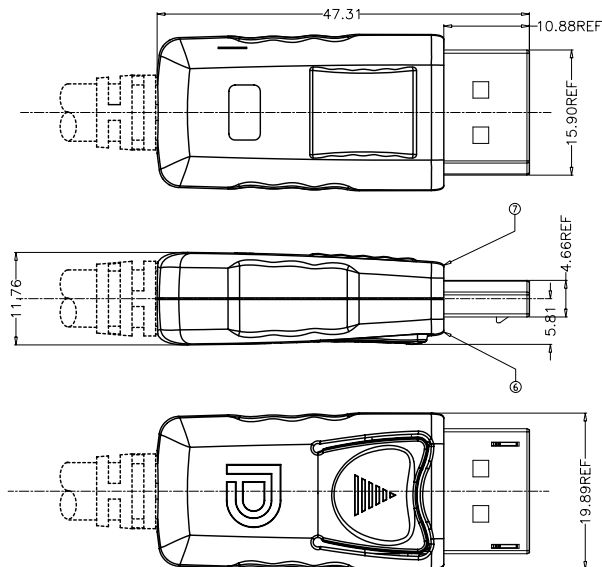

NOTE:

1. MECHANICAL :
 - 1.1 INSERTION FORCE :44.1 N MAX
 - 1.2 WITHDRAWAL FORCE :9.8 N MIN AND 39.2N MAX
2. ELECTRICAL :
 - 2.1 CONTACT CURRENT RATING: 0.5A MIN.
 - 2.2 VOLTAGE RATING :40V AC (rms)
 - 2.3 WITHSTANDING VOLTAGE: 500 VAC FOR 1 MINUTE.
 - 2.4 INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - 2.5 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
3. ENVIRONMENTAL :
 - 3.1 OPERATING TEMPERATURE:-25°C TO +85°C



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.20
.XXX ±
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

DISP-PA-20-LF
SERIES T LEADFREE
20WAY
ASSEMBLY
MALE

DESCRIPTION: DISPLAYPORT 20PIN PLUG ASSEMBLY TYPE