
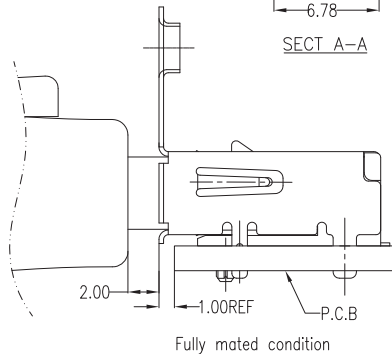
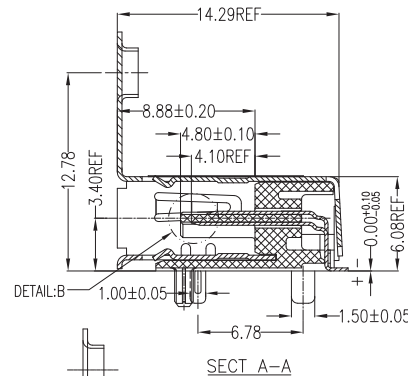
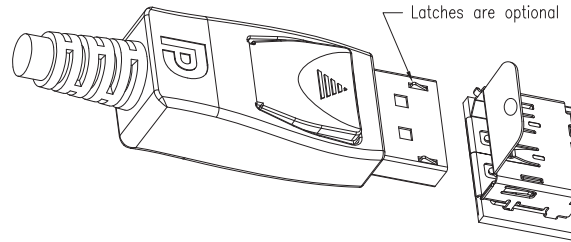
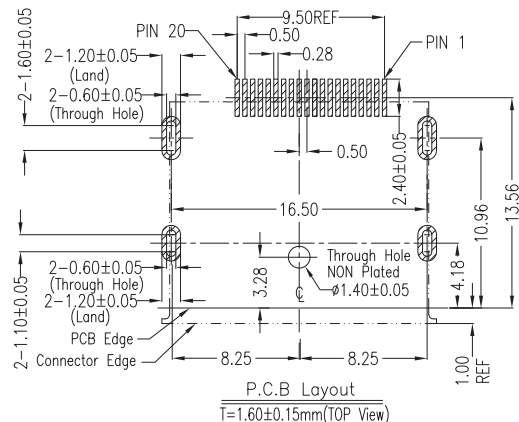
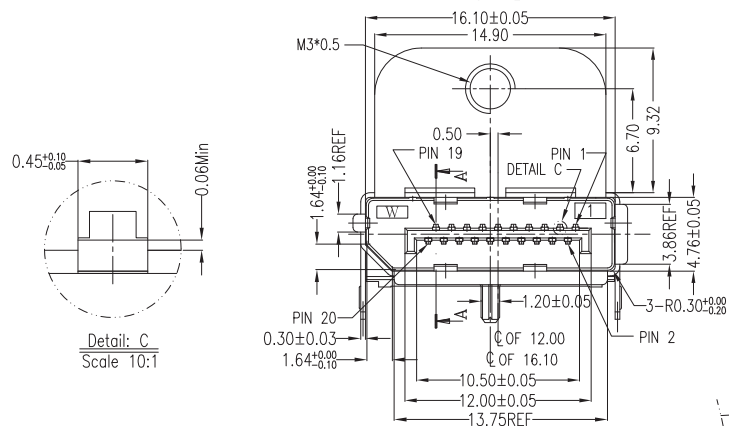


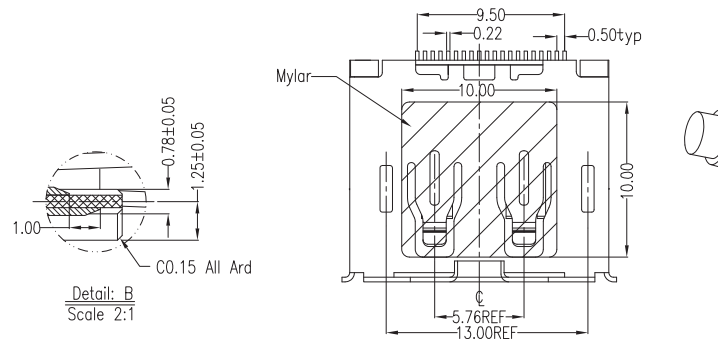

NOTES:

*Material

Housing: LCP+50%G.F., UL94V-0 Rated; Color: Black.
Shield: Brass.
Plating: Nickel(40~80u") Plating .
Contact: Brass.
Plating: Gold Plating Over Nickel(40~80u") on Contact Area; Tin(100~250u") Plating on Solder Tail.

*Electrical Specification

Operation Voltage: 40 VAC max.
Current Rating: 0.5 Ampere per contact
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 100 Megohms min.
Dielectric Withstanding Voltage: 500 VDC

*Environmental

Operating Temperature: -20°C to +85°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

SIZE A4

PPOJECTION

ANG ±

照片框

ORDER INFORMATION

DISP-SWMNPC-20-LF
SERIES
FEMALE
90°SMT
LEADFREE
20 WAY
MYLAR
POST
NUT
METAL

DESCRIPTION: DisplayPort Peceptacle (Female) SMT Type(With Flange)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com